

**READ & SAVE THESE INSTRUCTIONS**  
**INSTALLATION & OPERATION**  
INSTRUCTIONS FOR: **FCW2000 SERIES**

**CAUTION:** Before connecting the fixture to power supply, be sure that the power is switched off.



Headquarters  
t 800 900 1730  
f 630 889 8106  
3609 Swenson Ave.  
St. Charles, IL 60174 USA  
[www.fclighting.com](http://www.fclighting.com)

**Instructions:**

1. Fixture safety is warranted only by proper use of the following instructions: please save them.
2. For semi-recessed installation: make hole in the wall with a minimum dimension 9-1/8" square, and a minimum depth of 6-1/2".
3. Make power supply connections in junction box attached to fixture.
4. Insert junction box and recessed portion of fixture into wall. Attach in four places using provided holes in mounting collar. **Note:** The outer edge of the fixture that comes in contact with the mounting surface must be silicone caulked by the installer. This is critical for a safe and reliable installation.
5. Lamp per label requirements. (Lamps are not included)
6. Screw jelly jar globe to base. Mount front plate to stand-off arms with provided hardware.


**GENERAL**

1. Before starting the installation, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.

2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.

**Note:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

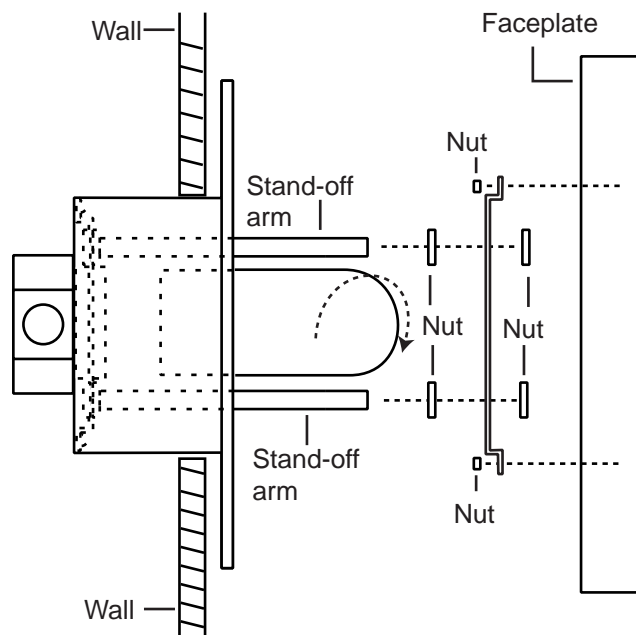

**Confidential**

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use, or reproduction is strictly prohibited.

©2003-2006, FC Lighting, Inc.