

READ & SAVE THESE INSTRUCTIONS
INSTALLATION & OPERATION
INSTRUCTIONS FOR: **FCD800-1200 SERIES**

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.



Headquarters
t 800 900 1730
f 630 889 8106
3609 Swenson Ave.
St. Charles, IL 60174 USA
www.fcighting.com


Install for concrete pour:

1. Mount and fix the pre-mounting box in the ground, make sure the installation height is within 2 cm above grade.
2. Make sure water drainage is arranged to avoid accumulation of water around the fixture.
3. After pavement is in place, adjust the mounting trim so that the trim is flush with the pavement surface.
4. Connect the wire and seal connections. (Fixture is provided with 3' cord.)
5. Attach the fixture into the mounting trim using stainless steel hex screws.

GENERAL

1. Before starting the installation, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.

Note: The important safeguards and instructions appearing in this sheet are not meant to cover all possible conditions and situations that may occur.

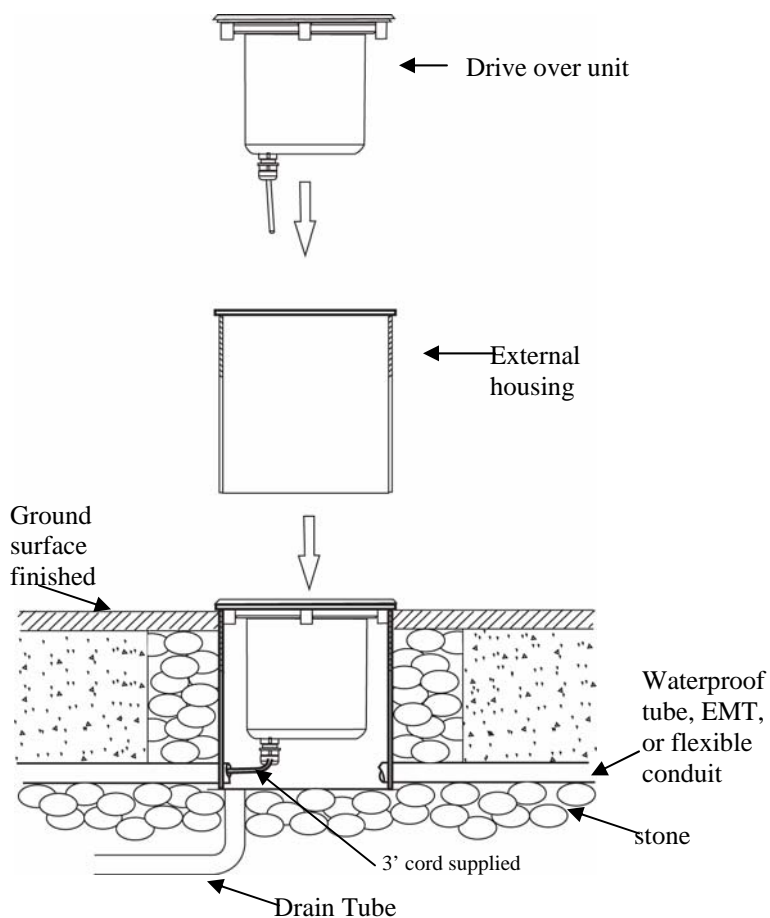

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use, or reproduction is strictly prohibited.

©2003-2008, FC Lighting, Inc.