

## FCSL400 Series (COMPONENT INSTALL) - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



OUTDOOR LIGHTING  
t 800.900.1730 f 630.889.8106  
3609 Swenson Ave. St. Charles, IL 60174

### GENERAL


1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances or the National Electrical Code.

**NOTE:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

### Component Installation:

1. The die cast housing should be installed following the instructions provided with those components. The flange of the housing must sit proud of the wall for proper sealing. **Fig A**  
**NOTE:** Use **ALT Fig A** when using optional Drywall Adapter (**DWA**).
2. **WARNING:** All power should be turned off at the breaker and locked out during installation.
3. Pull wires to the fixture. Leave enough wire out for completing connections.
4. Attach Ground (green) Wire to housing lead. Neutral (white) and Hot (black) to ballast/socket wire leads. Then attach Mounting Bracket to inside back of the Housing using two screws. **Fig B**
5. Position LED Board by aligning holes to Mounting Bracket. Manage wires behind LED Board to avoid pinching of leads. Attach LED Board by using two screws provided. **Fig C**
6. Turn on power and check for proper illumination. Turn off power.
7. Attach Faceplate and Lens assembly using screws provided. Be sure screws are tightened evenly and snug hand tight. **Fig D**
8. Turn breaker on.

**NOTE:** Fixtures are listed for installation with liquid tight or rigid wall conduit only. Fixtures installed without a silicone bead will void the warranty.

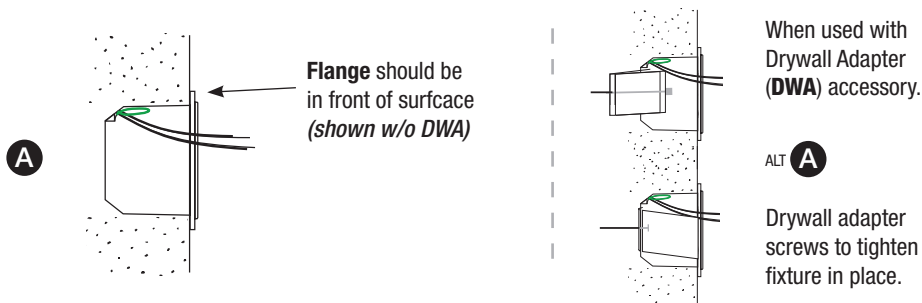

### DETAILED ILLUSTRATION

