

READ & SAVE THESE INSTRUCTIONS
INSTALLATION & OPERATION
INSTRUCTIONS FOR: FCC813

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.




Headquarters
t 800 900 1730
f 630 889 8106
3609 Swenson Ave.
St. Charles, IL 60174 USA
www.fcighting.com

Instructions

1. Remove fixture from wall mounting box/arm, by loosening four (4) screws, two (2) at top and two (2) at bottom.
2. Wire power supply wires to fixture wires, be certain to make secure connections.
3. Install wall mounting box/arm over junction box using #10 holes, provided. See Fig. D. Fasteners by others.
4. Reattach fixture to wall mounting box/arm, being certain to fasten securely.
5. The outer edge of the fixture that comes in contact with the mounting surface must be silicone caulked by the installer. This is critical for a safe and reliable installation.
6. Remove the lens ring from the fixture by taking off four phillips flat head screws. Lamp per label requirements. (Lamp by others.)
7. Replace the lens and the lens ring to the fixture.

WARNING: Fixture must always be mounted with lens facing upwards.

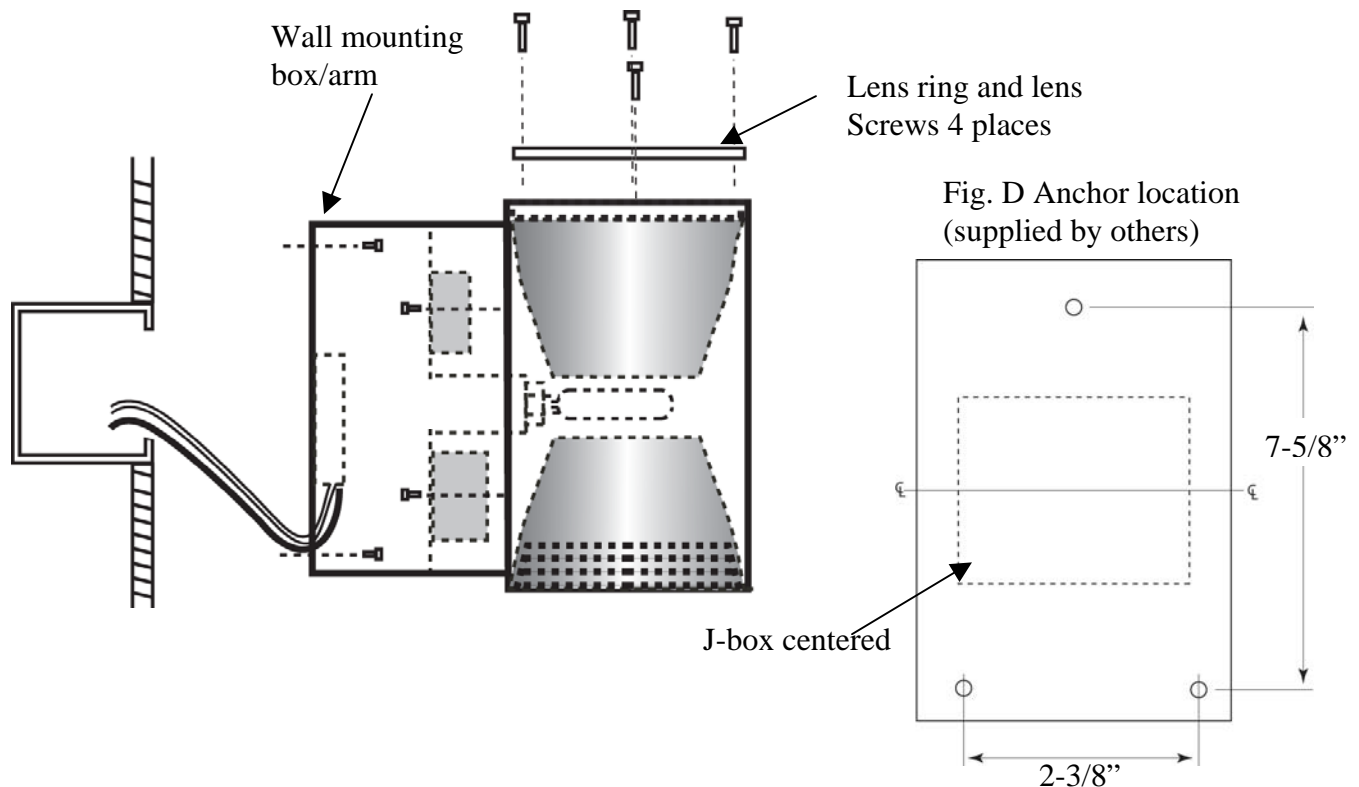

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use, or reproduction is strictly prohibited.

©2005-2006, FC Lighting, Inc.