

READ & SAVE THESE INSTRUCTIONS INSTALLATION & OPERATION

INSTRUCTIONS FOR :FCD7000 SERIES
for concrete pour only

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.



t 800.900.1730
f 630.889.8106
3609 Swensove Ave
St. Charles, IL 60174
www.fcighting.com


Install for concrete pour:

1. Mount and fix the external housing in the ground, make sure the installation height is with-in 2 cm above grade.
2. Make sure water drainage is arranged to avoid accumulation of water around the fixture. French drain recommended in clay soil.
3. After pavement is in place, adjust the mounting trim so that the trim is flush with the pavement surface.
4. Connect the wire and seal connections. (fixture is provided with 3' cord.)
5. Insert the fixture into the external housing. Be sure the tab at each end is rotated out of position. Once the fixture is seated in the external housing, tighten the screws until snug.

General:

1. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.

NOTE: The important safegaurds and instructions appearing in this document are not meant to cover all possible conditions and situations that may occur.

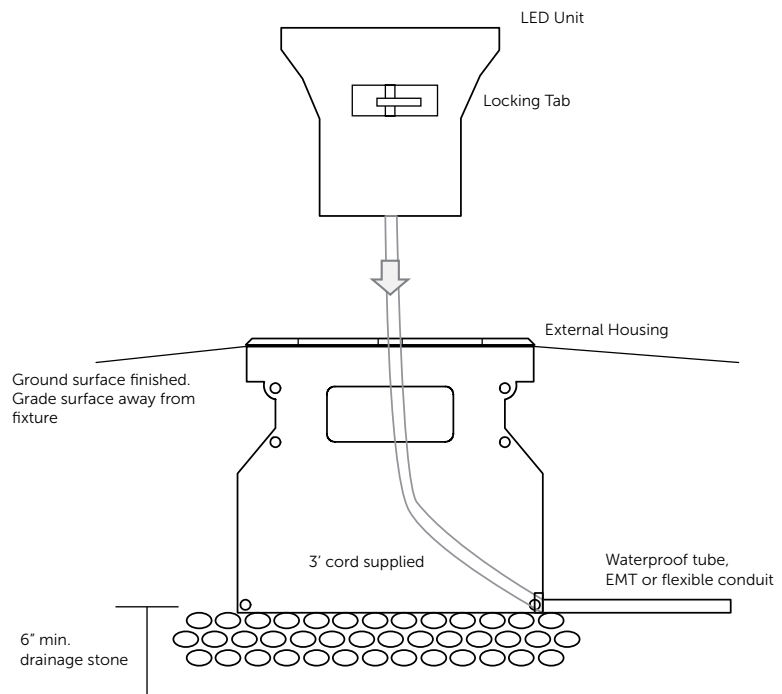

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use or reproduction is strictly prohibited.

©2006, FC Lighting, Inc.