

FCSL1000 SERIES - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.

Includes SL1011, SL1012, SL1013, SL1014, SL1015

NOTE: For Single Gang Box Installation



FC
LIGHTING

t 800.900.1730 f 630.889.8106
3609 Swenson Ave. St. Charles, IL 60174

GENERAL:

1. Fixture must be installed by licensed electrician.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code..
3. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
4. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.


INSTALLATION INSTRUCTIONS:

- 1) Remove the Mounting Plate from the back of the step light by unscrewing the Set Screw from the bottom of the faceplate. See FIG. A. Then make the wiring connections at the J-Box.
- 2) Use J-Box Mounting Screws to fasten the Mounting Plate to the J-Box on the intended surface, See FIG. B. It mounts to a standard sized J-Box.
NOTE: Position Weep Hole to bottom.
- 3) Reattach the faceplate to the mounting plate using bottom Set Screw. Tighten to ensure fixture is level and secure.
- 4) For exterior applications, **installer must silicone caulk** the outer edge of the fixture that comes in contact with the mounting surface.
IMPORTANT: Do not caulk over weep hole opening in bottom of faceplate, this is critical for a secure and reliable installation.
- 5) Restore power to circuit then test fixture.

NOTE: LED lamping is integral and NOT intended for general servicing.

NOTE: Fixtures are listed for installation with liquid tight or rigid wall conduit only. Fixtures installed without a silicone bead will void the warranty.

DETAILED ILLUSTRATION

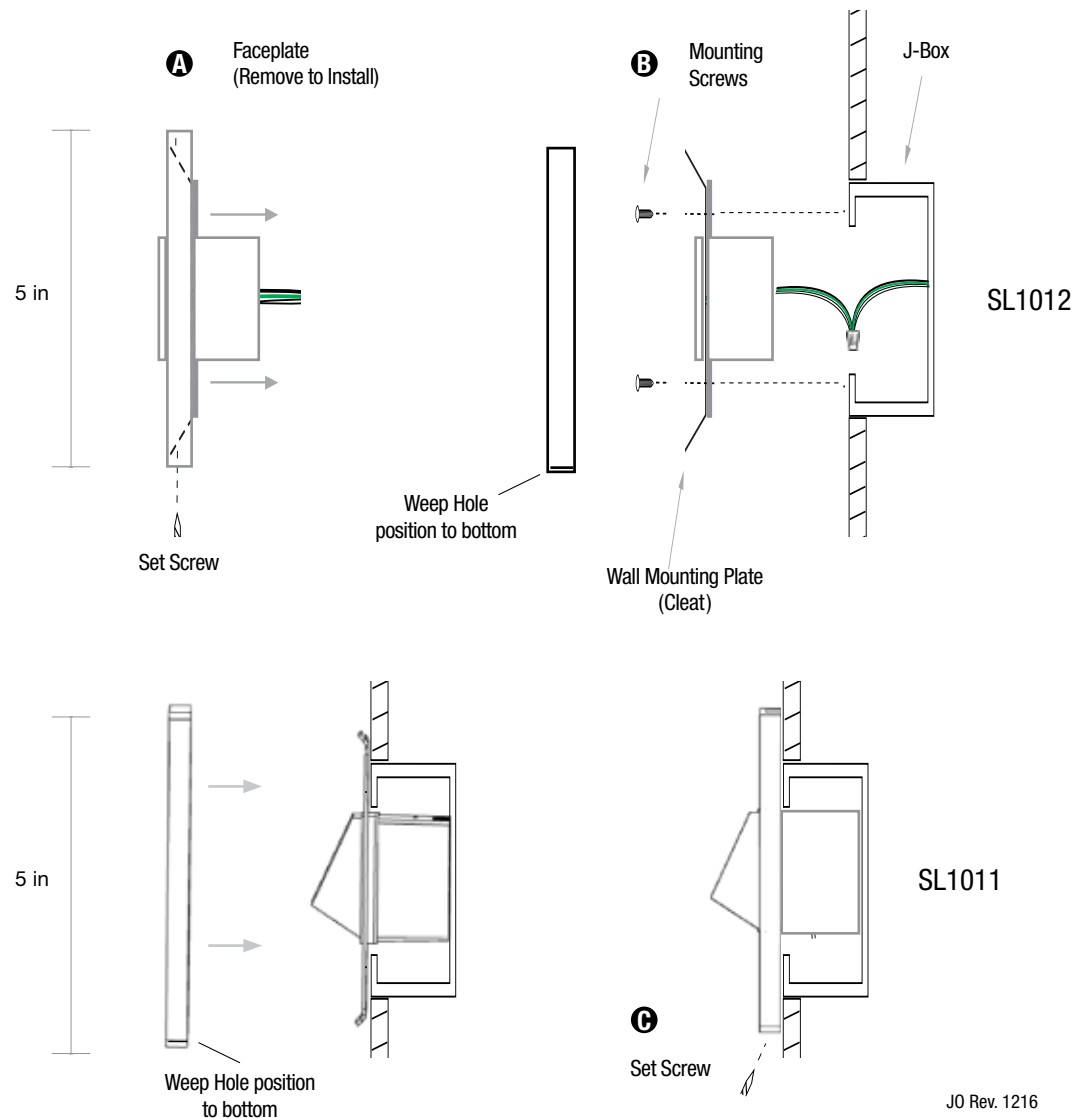

JO Rev. 1216