

**READ AND SAVE THESE INSTRUCTIONS**  
**INSTALLATION AND OPERATION**  
INSTRUCTIONS FOR: FCDLED23 (concrete pour)

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.

**GENERAL**

1. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.


2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.

**NOTE:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

**INSTALL FOR CONCRETE POUR:**

- 1) Mount and fix the external housing in the ground, make sure the installation height is within 2 cm above grade.
- 2) Make sure water drainage is arranged to avoid accumulation of water around the fixture.
- 3) Connect the wire and seal connections. (fixture is provided with 3' cord)
- 4) Mount remote driver and wire in series. Driver powers between 1 to 6 LEDs. Overloading driver will cause flashing or no illumination.

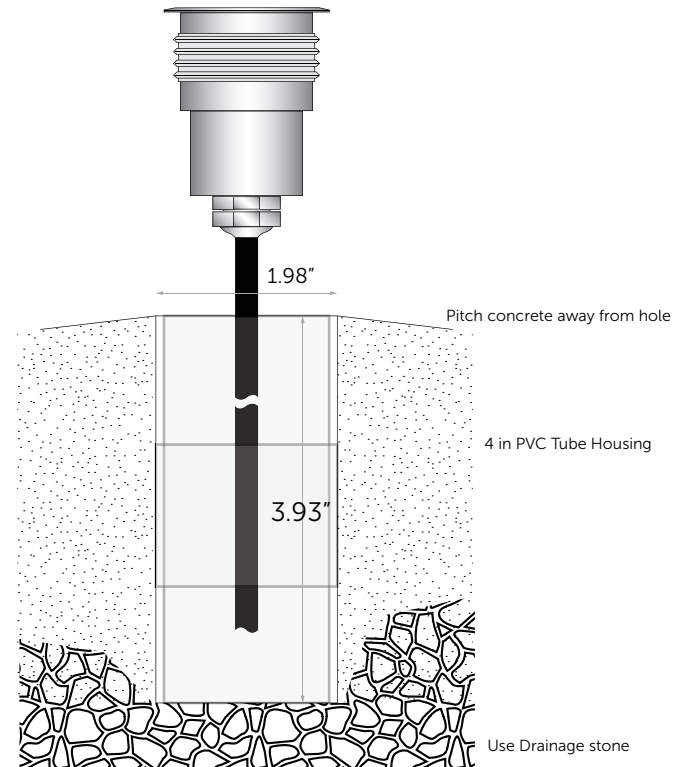

corporate  
t 800.900.1730  
f 630.889.8106  
3609 Swenson Ave.  
St. Charles, IL 60174

**CONFIDENTIAL**

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF FC LIGHTING, INC. ANY UNAUTHORIZED TRANSFER, USE OR REPRODUCTION IS STRICTLY PROHIBITED.  
©2011 FC LIGHTING, INC.