

READ & SAVE THESE INSTRUCTIONS
INSTALLATION & OPERATION
INSTRUCTIONS FOR: FCLED21 / D21

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.



Headquarters
t 800.900.1730
f 630.889.8106
3609 Swenson Ave.
St. Charles, IL 60174 USA
www.fclighting.com


Install for concrete pour:

1. Mount and fixture in the ground, make sure the installation height is within 2 cm above grade.
2. Make sure water drainage is arranged to avoid accumulation of water around the fixture.
3. Connect the wire and seal connections (Fixture is provided with 3' cord).
4. Mount remote driver and wire in series. Driver powers between 1 to 6 LED's. Overloading driver will cause flashing or no illumination.

General:

1. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.

Note: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

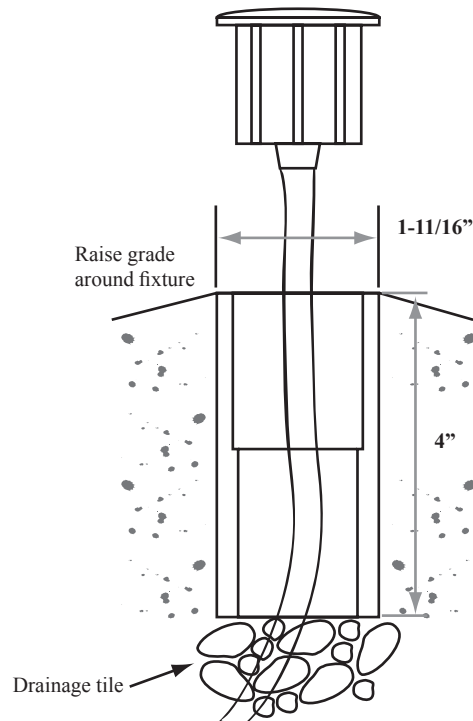

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use, or reproduction is strictly prohibited.