

READ AND SAVE THESE INSTRUCTIONS
INSTALLATION AND OPERATION
INSTRUCTIONS FOR: FC SL550

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



corporate
t 800.900.1730
f 630.889.8106
3609 Swenson Ave.
St. Charles, IL 60174


GENERAL

1. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

INSTALLATION

- 1) Remove the four (4) screws holding the lens and face.
- 2) Remove internal components.
- 3) **FOR DRYWALL:** Cut opening in wall for mounting. Opening should be $5\frac{5}{16}'' \times 3\frac{3}{16}''$.
- 4) **FOR CONCRETE POUR:** Level and stabilize fixture. Insert back box in form with lip edge of back box against outside of mounting surface. If provided back box-less electrical assembly, be sure to cover holes on back of fixture housing to prevent leakage. The hole is used to mount ballast to fixture.
- 5) Connect power through rear hole.
- 6) Once mounting is complete, connect ground wire to provided green ground wire on fixture.
- 7) Replace ballast cover, secure ballast tray and install approved lamp or LED provided.
- 8) Attach lens and frame, replace four (4) screws and tighten evenly.
- 9) Restore power and test fixture. If fixture does not turn on, disconnect power before checking for problems.

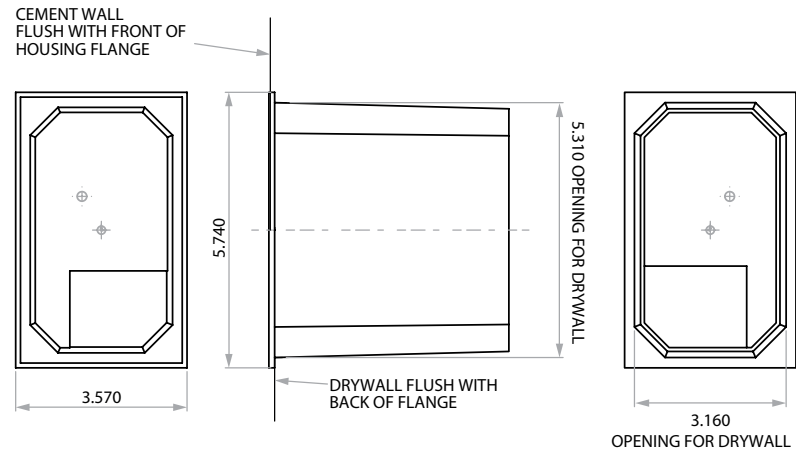

CONFIDENTIAL

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF FC LIGHTING, INC. ANY UNAUTHORIZED TRANSFER, USE OR REPRODUCTION IS STRICTLY PROHIBITED.
©2010 FC LIGHTING, INC.