

READ & SAVE THESE INSTRUCTIONS
INSTALLATION & OPERATION
INSTRUCTIONS FOR: FCWS6300

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.



Headquarters
t 800 900 1730
f 630 889 8106
3609 Swenson Ave.
St. Charles, IL 60174 USA
www.fclighting.com

1. Remove outer housing assembly by removing the screws holding it to the back plate assembly. Set aside for re-attachment of outer housing assembly.
2. Make electrical connections in outlet box.
3. Run a bead of caulk around outlet box on wall to create a seal for electrical connections between wall and fixture.
4. Mount back plate. Handle carefully while installing.
5. Install proper lampholder per fixture labeling.
5. Install outer housing assembly to back plate using 5 / 8-32 stainless steel screws, set aside previously.



GENERAL

1. Before starting the installation, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.

2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.

Note: The important safeguards and instructions appearing in this sheet are not meant to cover all possible

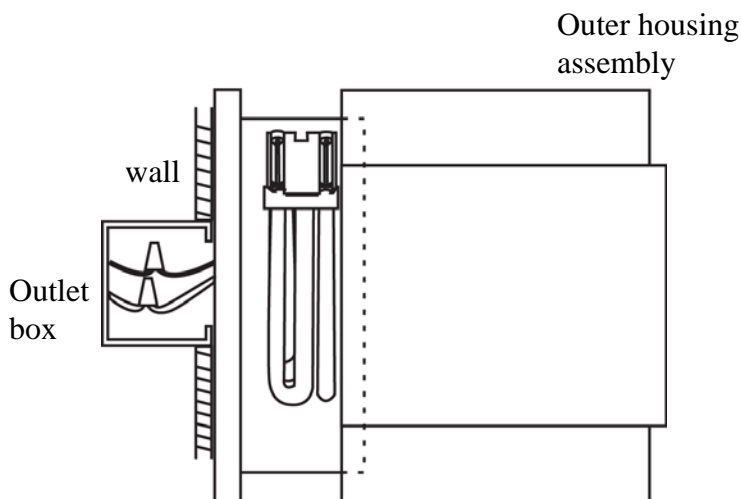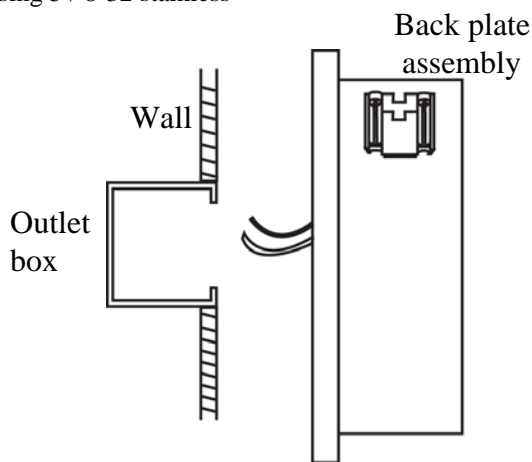

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use or reproduction is strictly prohibited.

©2003-2006, FC Lighting, Inc.