

READ & SAVE THESE INSTRUCTIONS
INSTALLATION & OPERATION
INSTRUCTIONS FOR: FCW7168-71 SERIES

CAUTION: Before connecting the fixture to power supply, be sure that the power is switched off.



Headquarters
t 800 900 1730
f 630 889 8106
3609 Swenson Ave.
St. Charles, IL 60174 USA
www.fcighting.com


Instructions:

1. Fixture safety is warranted only by proper use of the following instructions: please save them.
2. Remove decorative face from mounting plate, by removing screws at the top and bottom. Remove lens and set aside with face.
3. Make power supply connections.
4. Using a bead of silicone caulk to the backside of mounting plate before attaching to create waterproof seal between the fixture and the mounting surface. Secure the back plate to the junction box and to the mounting surface with holes provided (hardware by others).
5. Install lamps per label requirements. (Lamps are not included)
6. Replace lens and decorative face. Secure with screws removed in step 2.

GENERAL

1. Before starting the installation, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box. Turning the power off at the light switch is not sufficient to prevent electrical shock.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the national electrical code.
4. These fixtures are intended to be mounted to a 4" x 2-1/8" deep metal octagon outlet box. The box must be directly supported by the building structure.

Note: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

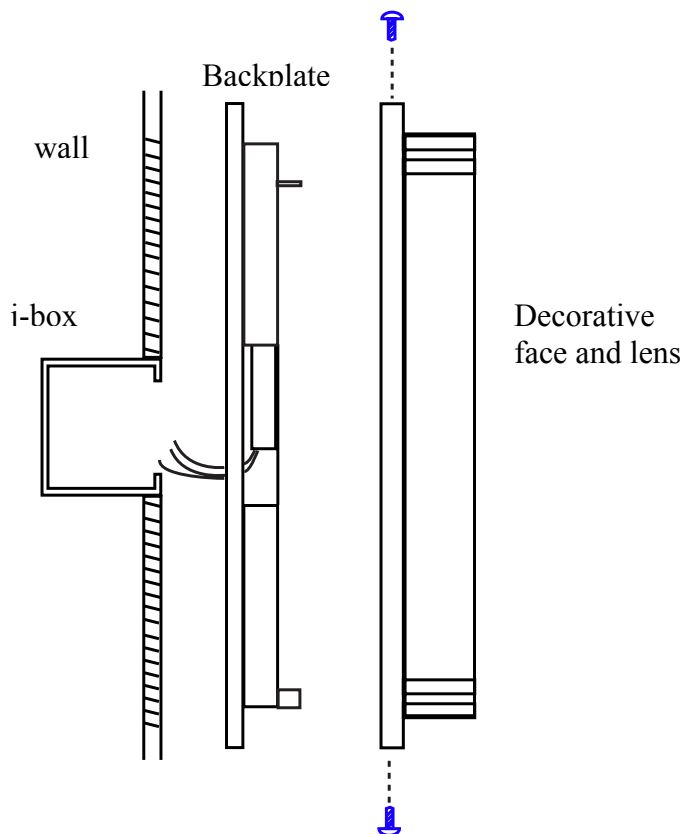

Confidential

This document is the proprietary property of FC Lighting, Inc. Any unauthorized transfer, use, or reproduction is strictly prohibited.

©2003-2006, FC Lighting, Inc.