


FCSL495 and FCSL595 - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE LUMINAIRE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. These luminaires are intended for mounting on a wall and wiring being completed within a J-Box.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.


INSTALLATION:

NOTE: When installing both the SL495 or SL595, Center the luminaire over an octagonal or single-gang J-Box so the wiring hole in the back Mounting Plate aligns with the front of the J-Box opening. **Fig. 1**

1. Make sure J-box is properly installed and wired appropriately. (By others)
2. Loosen ALL 3 side set screws to remove back Mounting Plate assembly.
3. Center junction box between mounting holes on Mounting Plate and level side to side against the wall. **Fig. 1** Use mounting holes on Mounting Plate as a template to mark the positions on the wall for hanging screws (by others). Ensure back plate is level. **Fig. 2**
4. Remove luminaire from wall and feed wires from luminaire through Mounting Plate and into J-Box. Complete all wiring at J-Box. **Fig. 3**
5. Installer **MUST** add a continuous bead of silicone caulk on the back of the Mounting Plate, as indicated, to avoid any water entering into the J-Box from above. **Fig. 1 and Fig. 3**
6. Secure the Mounting Plate to the wall with hanging screws in the previously mark positions, while keeping the luminaire level. **Fig. 3**
7. Install Luminaire onto Mounting Plate using supplied set screws. **Fig. 4**

NOTE: Luminaires are listed for installation with liquid tight or rigid wall conduit only. Luminaires installed without a continuous silicone bead will void the warranty.

FCSL495 and FCSL595 install using the same method.

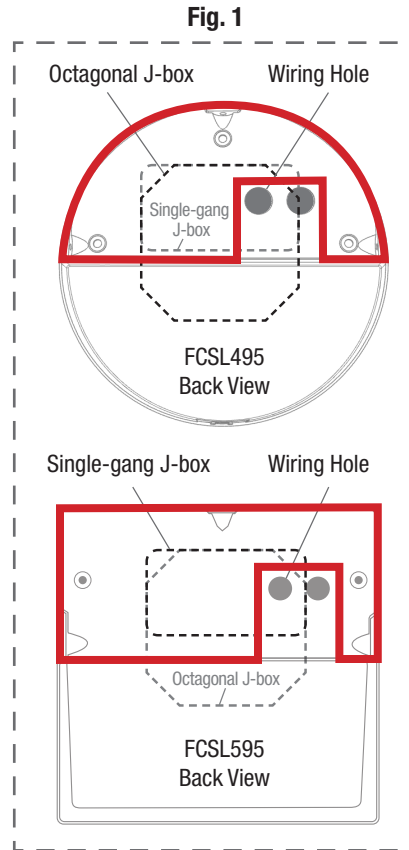

Note: Continuous Silicone Bead indicated above by solid red line.

Note: J-Box to be sealed with cover by others.

DETAILED ILLUSTRATION

