



corporate  
t 800 900 1730  
f 630 889 8106  
3609 Swenson Ave  
St. Charles, IL 60174

## FCD65I

LED recessed  
or inground



### Catalog Number

Series	Voltage	Wattage	Finish	Accessories
FCD65I	120V - 240V	LED: 3W 9W	SS Stainless Steel	C Clear lens PWH PVC well housing required

### Product Information

**Listing:** UL & cUL listed for wet locations. IP65 rated.

**Construction:** Marine grade, corrosion resistant, heavy walled, high pressure die cast aluminum construction. Faceplate is 316 stainless steel.

**Gasket:** Extruded silicone to provide maximum protection against contaminants.


**Fasteners:** Captive and recessed stainless steel screw with stainless steel retained nuts.

**Diffuser:** Lens is heat resistant, white, opal, tempered glass.

**LED:** Integral inverter and driver potted with a variable input of voltage from 120V to 240V. Consult factory for color changing or multi-color combinations and other voltage options.

**Finish:** Stainless steel brushed finish.

**Mounting:** Concrete pour, requires drainage.

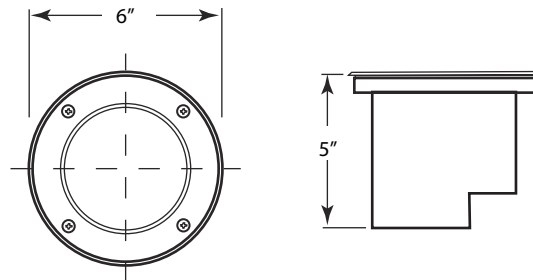

PVC Housing

