



FCSL Series

Exterior die cast step light with die cast faceplate for masonry applications



Step light

corporate
t 800 900 1730
f 630 889 8106
3609 Swenson Ave
St. Charles, IL 60174

Catalog Number

Series	Voltage	Wattage	Finish	Accessories
FCSL520	120V - 277V	INC: 10W G4 12V 25W A15 HID: 39 MH G12 (remote only) LED: 5W	BK Black BZ Bronze CC Custom Color SL Silver WH White	DWR Dry wall wings for remodeling applications EC E-coat (use for coastal/ severe weather areas) EMR Emergency back-up, remote (PL only) F Fuse OL Opal lens PCL Polycarbonate lens (PL only) PL Prismatic lens SLH Spread lens, horizontal SLV Spread lens, vertical

▼Remote ballast only

Product Information

Listings: UL & cUL listed for interior and exterior wet locations.

Housing & Faceplate: Corrosion resistant heavy walled solid die cast aluminum construction.

Gasketing: Neoprene continuous closed cell 'O' ring gasket to seal out contaminants.

Fasteners: Captive and recessed stainless steel, tamper resistant, hex socket screws.

Diffuser: Lens is 1/8" thick, tempered, heat resistant, frosted glass.

Reflector: Precision formed semi-specular aluminum for maximum reflectance.

Socket: PL: Four pin plug-in type compact fluorescent lamp holder (lamp by others). Holder assures precise optical alignment. **INC (120V only):** Medium base or bi-pin porcelain socket (as per lamp choice). Nickel plated shell, spring loaded contact. **HID:** G12 base 4KV pulse rated porcelain socket. Nickel plated shell, spring loaded contact. Incandescent and HID socket wire is double silicone jacket wire with a 200°C rating.

LED: Integral inverter and driver potted with a variable input of voltage from 120V to 240V. Consult factory for color changing or multi-color combinations and other voltage options.

Ballast: PL: Fluorescent high power factor electronic UL listed ballast standard.


INC (120V only): medium base or bi-pin porcelain socket (as per lamp choice). Nickel plated shell spring loaded contact and double silicone jacket wire with a 200°C rating.

Remote HID: Electronic ballast standard. Ballast is thermally protected and is rated HPF > 90% THD < 10%. Ballast has a manufacturer issued 5 year warranty. Electronic universal voltage. 120V through 277V is standard. 120V through 277V is standard. Please consult factory for other voltage options.

Finish: Five stage preparation process that includes chromate conversion and TGIC super polyester powder-coat as standard. Optional E-coat process added to standard finish including zinc phosphate. E-coat comes with a 5 year warranty.

Mounting: Concrete pour.

Front View

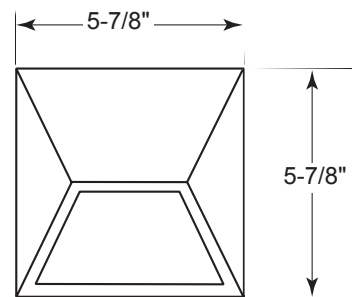

Side View

