


FCC4301R Six-Inch Round Cylinder – Wall or Pendant Mount Down Lighting

Remote Driver and Battery Backup

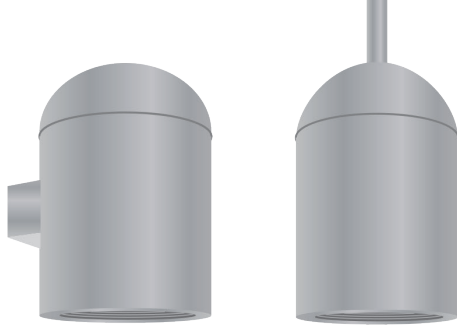

FEATURES

- Up to 2000 lumens (4000K)
- Remote Driver with Battery Backup options
- Clear anti-glare tempered glass lens (IK09)
- Multiple housing colors
- 0-10V 1% Dimming
- 93 CRI with 2 SDCM

PERFORMANCE

Beam Spread: 15°, 40°, 50°, 72°
CCT Options: 2700K, 3000K, 3500K, 4000K
CRI: 93 CRI
Consistency: 2 SDCM (Luminaire to Luminaire)
Lumens: 700 - 2000 lumens
Lumen Maintenance: L70 > 70,000 hours



PHYSICAL

Mounting: Mounts directly to standard recessed junction box with wall mount or twist-lock canopy. Additional holes allow unit to be attached directly to mounting surface.

Housing: Heavy-walled, marine grade, corrosion resistant die-cast aluminum housing with wall mount or twist-lock canopy. Silicone 'O' ring gasket to seal out contaminants. Captive and recessed stainless steel, tamper resistant hex socket screws.

Finish: Available in Black, Bronze, Graphite Grey, Silver, White and Custom Colors. Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm minimum, 5,000 hour salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.

Warranty: 5-Year limited warranty

Lens: IK09 impact compliant, 1/8" thick clear, tempered glass

Ingress Protection: Continuous silicone gasket to seal out contaminants, IP65 rated for dry, damp or wet locations.

Weight: 6-10 lbs (Depending on Length)

ELECTRICAL

Voltage: Universal 120 - 277 VAC standard, 347 VAC optional

Power Supply: Integral Class II, electronic high-power factor >.90, THD < 20%, FCC Title 47 Part 15 Class A

Power Consumption: 36W Maximum



Dimming: 0-10V 1% Dimming

Standards:

- cETLus Listed, CE, NOM, and RoHS Compliant.
- Wet location listed for wall or ceiling mount IP65 Ingress protection.
- 1.5G (ANSI C136.31) Vibration resistance rated.
- IK09 (IEC6226) Impact resistance rated.
- IESNA LM79 Photometric testing by NVLAP accredited test lab.
- IESNA LM80 LED testing by NVLAP accredited test lab.
- IESNA TM21 Luminaire lumen depreciation projection to > 70,000 hours.

PHYSICAL DIMENSIONS

Luminaire	Height (H)
FCC4301R	8.625" Height
FCC4301RP	8.625" Height

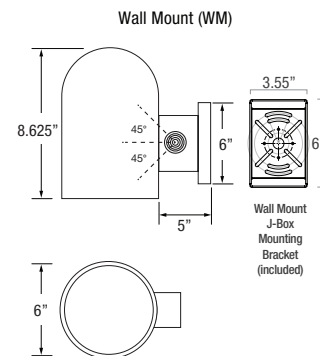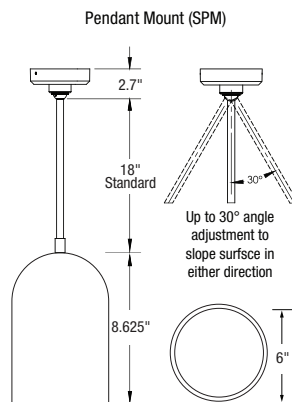

FCC4301R Six-Inch Round Cylinder – Wall or Pendant Mount Down Lighting

PRODUCT CODE

EXAMPLE: FCC4301R-SPM-18-UNV-927-7L-BKE-15-LD

MODEL	MOUNTING	SUSP LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	OPTIC	DIMMING	OPTIONS	BATTERY/REMOTE DRIVER
FCC4301R										

MODEL

FCC4301R

LED DRIVER REMOTE (INDOOR)
IP20, IK08, NEMA 1, -20°C to +50°C,
30' MAX Distance with 12AWG.
*Consult factory for outdoor remote
driver only.

MOUNTING

SPM Slope Pendant

WM Wall

SPM LENGTH

Specify the optional suspension length in inches.
(Top of luminaire to ceiling) (SPM 18" Standard,
6"-120" Max; 61"-120" w/LD & ET Only and stem
comes in 2 sections) *Consult factory & price
guide for other lengths.

VOLTAGE

UNV Universal 120 - 277 VAC

347V 347 VAC

COLOR

927 (93CRI) 2700K

930 (93CRI) 3000K

935 (93CRI) 3500K

940 (93CRI) 4000K

LUMENS typical

7L 700 lm @ 12 W

12L 1200 lm @ 24W

20L 2000 lm @ 36W

FINISH

BKE Black

BRE Bronze

GRE Graphite Grey

SLE Silver

WHE White

CCE Custom Color

OPTIC nominal

15 Spot (15°)

40 Narrow Flood (40°)

50 Flood (50°)

72 Wide Flood (72°)

DIMMING

LD 0-10V Dimming, 1% (Remote)

OPTIONS

N/A (Leave Blank)

BATTERY/REMOTE DRIVER

BBUR BATTERY BACK-UP & LED DRIVER REMOTE
(INDOOR), IP20, IK08, NEMA 1, 0°C to +48°C, 30'
MAX Distance with 12AWG (w/UNV Option Only)

BBUX BATTERY BACK-UP & LED DRIVER REMOTE
(OUTDOOR), IP67, IK10, NEMA 4X, -20°C to
+55°C, 30' MAX Distance with 12AWG (w/UNV
Option Only)

DRR LED Driver Only Remote (INDOOR) 30' MAX
Distance with 12AWG (w/UNV Option Only)

DRX LED Driver Only Remote (OUTDOOR) 30' MAX
Distance with 12AWG (w/UNV Option Only)

FCC4301R Six-Inch Round Cylinder – Wall or Pendant Mount Down Lighting

LUMENS / WATTAGE typical

Model	Watts	940
FCC4301R	12 W	700 lm
	24 W	1200 lm
	36 W	2000 lm





IES Multiplier	
Color	Multiplier
927	0.93
930	0.97
935	0.99
940	1.00

*83CRI±1.15 Consult factory.

TRIAC & ELV Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Glyder GLV-600
	Diva DVLV-600P
	Diva DV-600P
	Diva DVELV-600P(303)
	Maestro MALV-600
	Nova T NT-1000
Leviton	Nova T NTELV-600
	Skylark SLV-600P
	RadioRA2-10ND
	SureSlide 6633
	Illumatech IPE04

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	Illumatech 010-IP710-DLZ


PHOTOMETRICS

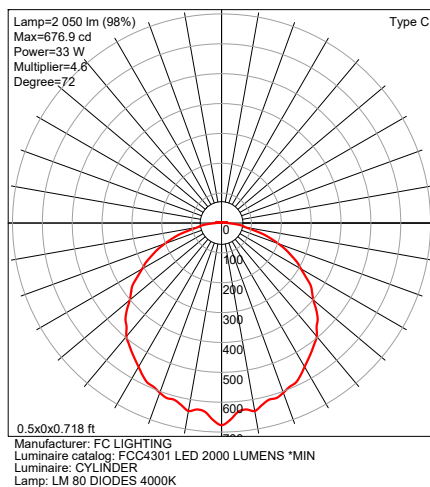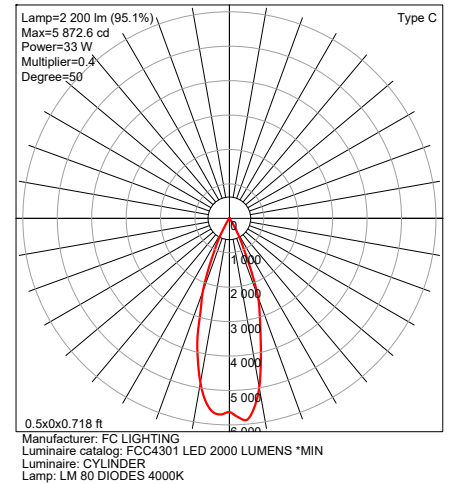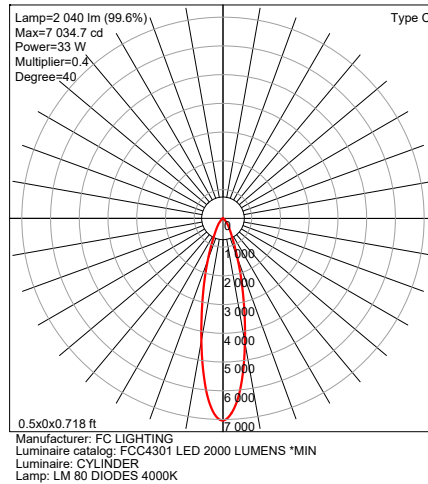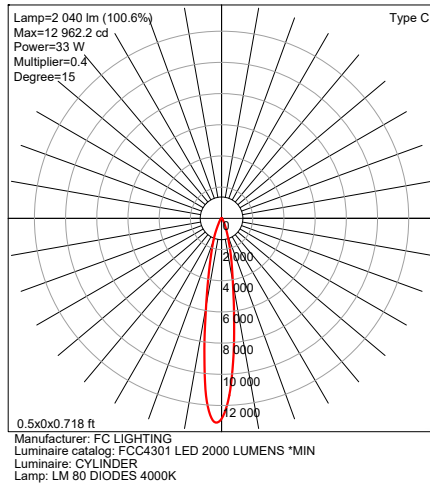

FCC4301R Six-Inch Round Cylinder – Wall or Pendant Mount Down Lighting

BATTERY BACK-UPS

BBUR - BATTERY BACK-UP & LED DRIVER REMOTE (INDOOR), IP20, IK08, NEMA 1, 0°C to +48°C, 30' MAX Distance with 12AWG (w/UNV Option Only)

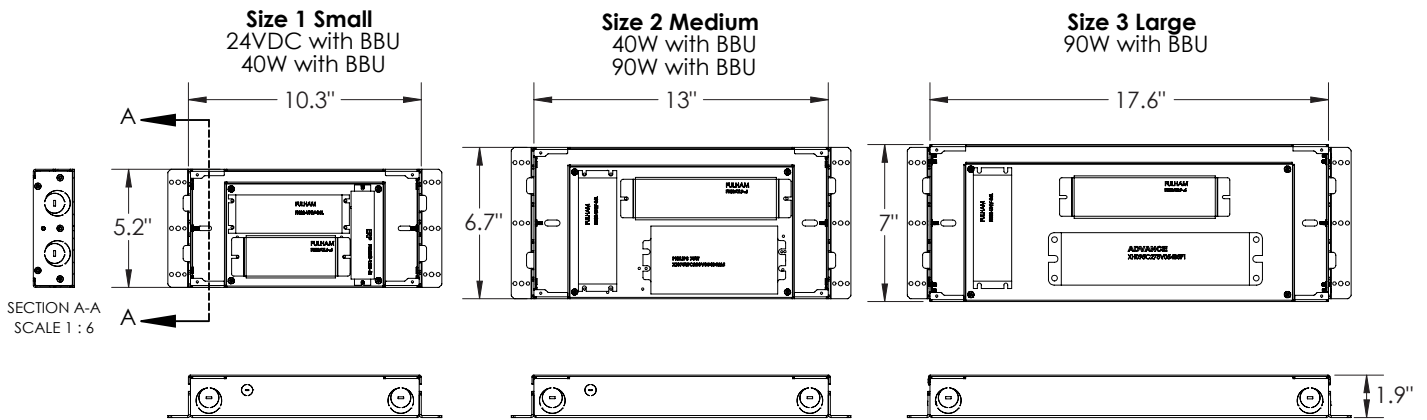

BBUX - BATTERY BACK-UP & LED DRIVER REMOTE (OUTDOOR), IP67, IK10, NEMA 4X, -20°C to +55°C, 30' MAX Distance with 12AWG (w/UNV Option Only)

