

FCA5500

Die-Cast Aluminum Linear
Cylindrical Post



Top View

ORDERING

FCA5500	120 VAC	84	827	56L	BKE	LD
SERIES	VOLTAGE	HEIGHT	COLOR	LUMENS	FINISH	OPTIONS
FCA5500	120 VAC	84 84" Min	827 (80CRI) 27K	56L 5600 lm (58W)	BKE Black	LD 0-10V Dimming
	277 VAC	163 163.25" Max	830 (80CRI) 3K	138L 13800 lm (109W)	BRE Bronze	LAB ¹ Less Anchor Bolt Kit - for shipment separate of Anchor Bolt Kit
		XXX (Custom, note in inches)	835 (80CRI) 35K		GRE Graphite Grey	
			840 (80CRI) 4K		SLE Silver	
					WHE White	
					CCE Custom Color	

ANCHOR BOLT KITS

A05502

Anchor Bolt Kit - Complete Anchor Bolt Kit shipped in advance of fixture.

¹ Note: Fixture must be mounted into FC Lighting supplied Anchor Bolt Kit shipped with or separate of fixture.

SPECIFICATION

MOUNTING

- A 0.50" thick die-cast base plate is provided and anchored through with a set of four 24" in length x 0.5" diameter hot dipped anchor bolts.
- Pole is included to maximum height (*specify custom heights*).

CONSTRUCTION

- Marine grade, corrosion resistant, heavy walled, high pressure die-cast aluminum with extruded pole. Easy access maintenance.
- Impact resistant, UV stabilized, opal diffuser.
- Neoprene continuous closed cell gasket to seal out bugs, water, dirt and debris. Captive and recessed stainless steel, tamper resistant hex socket screws.

LIGHT OUTPUT

- Lumens stated are the minimum. LED lifetime is greater than or equal to 70,000 hours with the lumen depreciation greater than L70. Luminaires are tested to LM 80 with a CRI of 80+ and color consistency of 4 SDCM.
- Input voltage 120 VAC or 277 VAC. Integral power supply.

FINISH

- Available in Black, Bronze, Graphite Grey, Silver, White and Custom Colors. Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm Min., 5,000 hour salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.
- 5 Year limited warranty.

LISTING

- ETL, U.S. and CA listed for wet location. IP65 Rating. CAL Green compliant.


Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.

Physical

FCA5500




PRODUCT DIMENSIONS - STANDARD PRODUCT

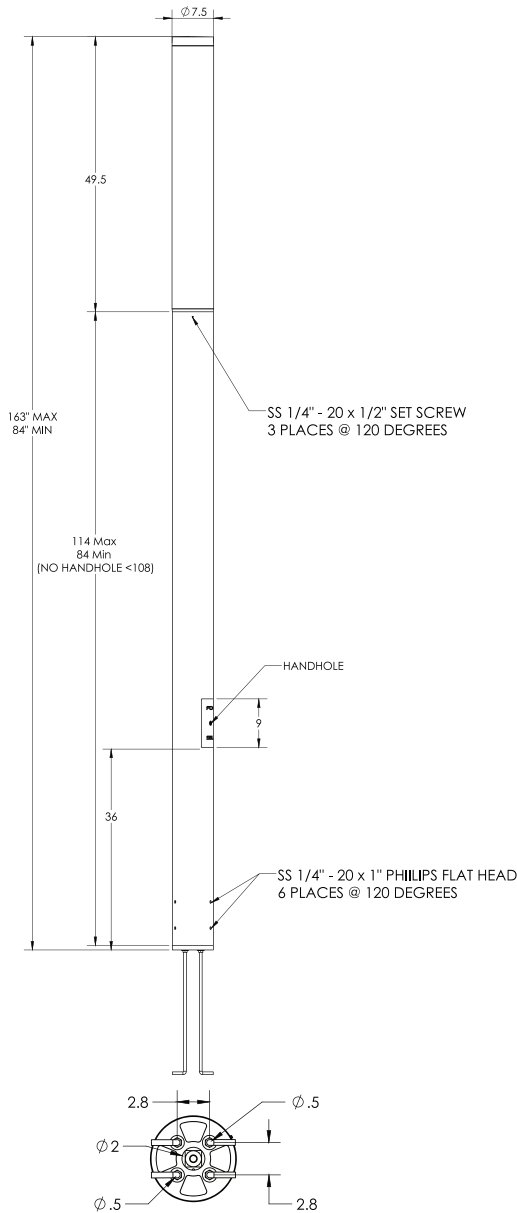

MOUNTING

Mounting Plate Diameter	$\phi 7.4$ "
Anchor Bolt Template Assembly	A05502

(Includes the below items listed)

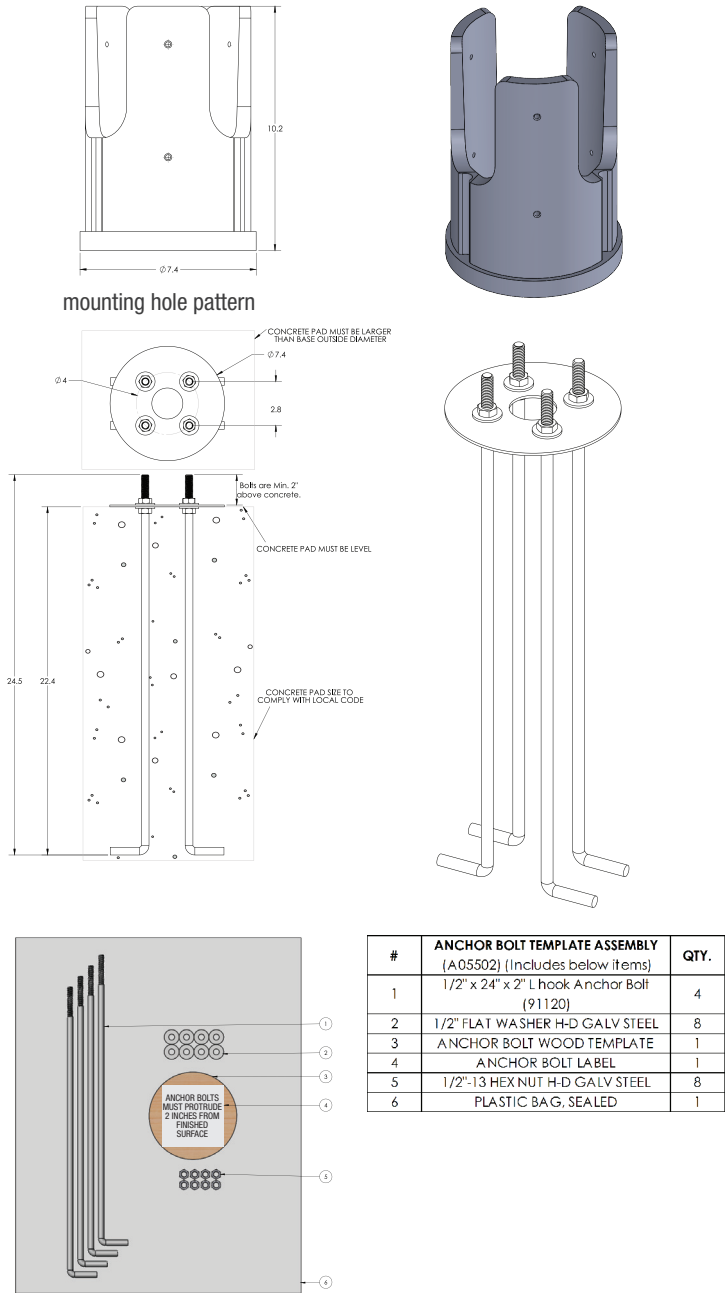

Due to continuous development and improvements, specifications are subject to change without notice. Product use certifies agreement to FC Lighting terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

© FC Lighting 3609 Swenson Ave. • St. Charles, IL • 60174 | fclighting.com | 800.900.1730


Specification Sheet

AG-DM-082823



Photometry

OPTICAL DISTRIBUTION

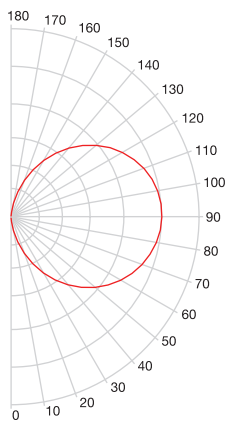

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

Specification Sheet