

## FCB6C-36N02



Date:

Type:

Fixture:

Project:

Approved:

**FCB6C-36N02** Exterior die-cast aluminum, 6" nominal diameter bollard with a 1.375" opening for a 360° light pattern and no visible lens. Rated IP66 for wet, damp or dry locations. The FCB6C-36N02 bollards are marine grade, corrosion resistant, heavy walled, high pressure die-cast aluminum. Circular housing is extruded aluminum. Impact resistant, UV stabilized, white, polycarbonate diffuser. Neoprene continuous closed cell gasket to seal out contaminants.

### SPECIFICATIONS

#### PHYSICAL

dimensions	39.55" H x 6.3" ø
weight	18 lbs
housing	Marine grade, corrosion resistant, heavy gauge extruded aluminum
lens	No visible lens
mounting	Heavy wall base bracketing for bollard installation provides a unique mounting solution, so the tower body anchors flush to the ground without the appearance of a base plate, anchor bolts included
ingress protection	IP66: dry, damp, or wet locations
finish	Available in Black, Bronze, Graphite Grey, Silver, White and Custom Colors. Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm Min., 5000hr salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.

#### PERFORMANCE

color temperature	2700K	3000K	3500K	4000K
lumen output	447	471	495	522
lumen maintenance	L70 >70,000 hours			
color consistency	3 SDCM   85 CRI			
operating temperature	-13°F to 104°F (-25°C to 40°C)			
warranty	5-Year limited warranty			

#### ELECTRICAL

input voltage	Universal 120 - 277 VAC   optional: 347 VAC   480 VAC
power supply	Integral Class II, electronic, high power factor > 94% @ 120V
certification	ETL/cETL Listed
standards	UL1598 / CSA C22.2 No. 250.0; UL 8750 / CSA C22.2 No. 250.13/IES LM-79/LM-80
power consumption	30W @ 120 - 277 VAC (maximum)
dimming	0-10V (10%)

Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to FC Lighting terms and conditions.



# Ordering Information

## ORDERING INFORMATION

FCB6C-36N02		39		5L		
SERIES	VOLTAGE	HEIGHT	CCT	LUMENS	FINISH	OPTIONS
<b>FCB6C-36N02</b>	<b>UNV</b> UNV 120 - 277 VAC	<b>39</b> 39.5"	<b>27K</b> 2700K	<b>5L</b> 522 lm (30W)	<b>BKE</b> Black	<b>LD</b> 0-10V Dimming (Standard)
	<b>347V</b> 347 VAC		<b>3K</b> 3000K		<b>BRE</b> Bronze	<b>SP20</b> 20kV Surge Protector
	<b>480V</b> 480 VAC		<b>35K</b> 3500K		<b>GRE</b> Graphite Grey	<b>BBU</b> Battery Backup (Integral)
	<b>120V</b> 120 VAC (Photo Eye)		<b>4K</b> 4000K		<b>SLE</b> Silver	<b>SP20-BBU</b> (2) 20kV Surge Protectors (1/LED Driver, 1/BBU) and Battery Backup (Integral)
	<b>277V</b> 277 VAC (Photo Eye)				<b>WHE</b> White	
					<b>CCE</b> Custom Color	<b>PE120</b> Photo Eye for 120 VAC
						<b>PE277</b> Photo Eye for 277 VAC
						<b>LAB</b> <sup>1</sup> Less Anchor Bolt Kit - for shipment separate of Anchor Bolt Kit

## ANCHOR BOLT KITS

### A00636-N02

Anchor Bolt Kit - Complete Anchor Bolt Kit shipped in advance of fixture.

<sup>1</sup> **Note:** Fixture must be mounted into FC Lighting supplied Anchor Bolt Kit shipped with or separate of fixture.

## Consult Factory for other options and configurations.

To ensure you receive proper configurations for your lighting specifications, contact us directly about any unique application requirements. This may include but not be limited to lumen output, mounting needs, or electrical requirements.

Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to FC Lighting terms and conditions.





Physical

PRODUCT DIMENSIONS - STANDARD PRODUCT

MOUNTING

mounting plate diameter	6.30" Ø
-------------------------	---------

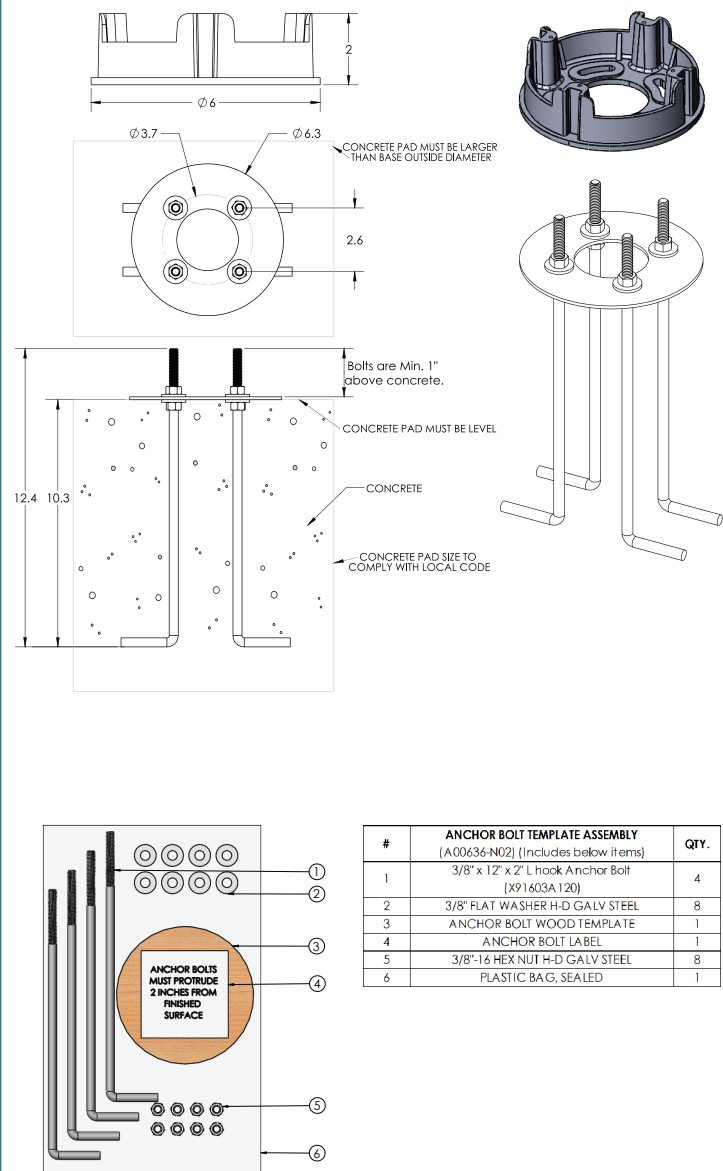
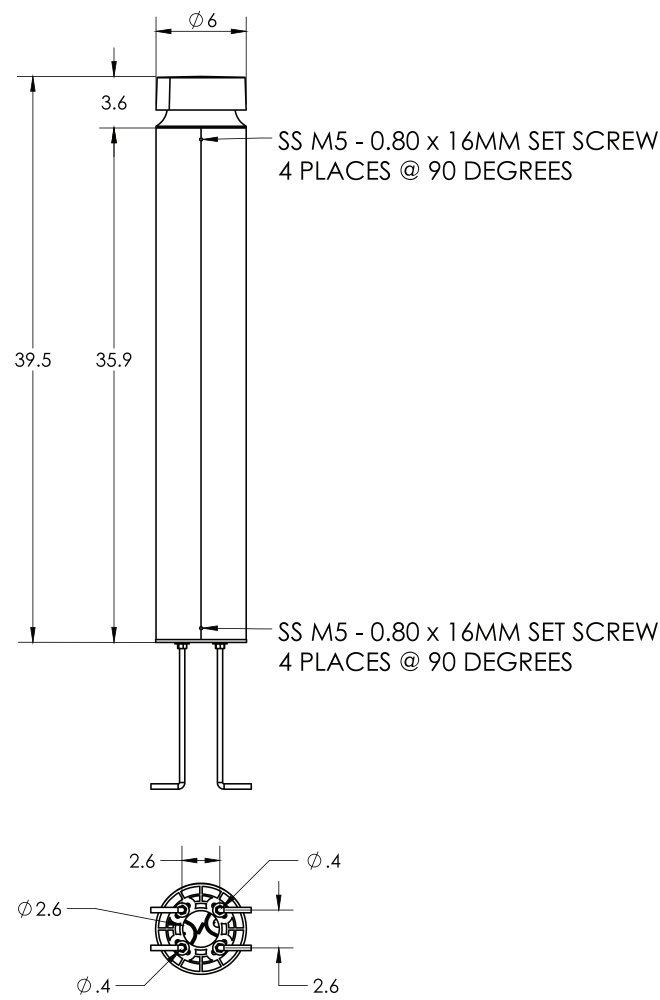


Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to FC Lighting terms and conditions.

# Photometry



## OPTICAL DISTRIBUTION

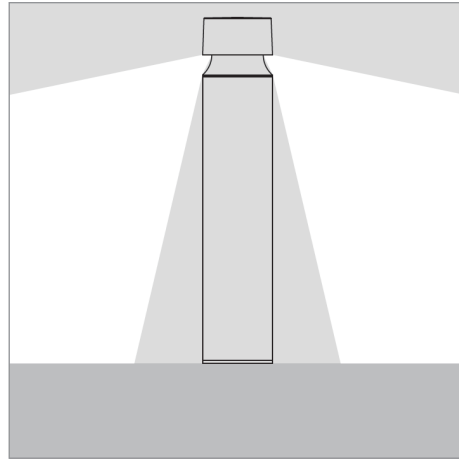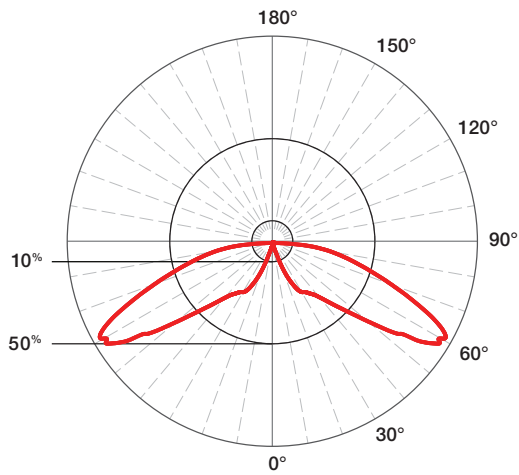

Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to FC Lighting terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

**Specification Sheet**