

FCBT690A



Wildlife Lighting Certified
by the Florida Fish & Wildlife
Conservation Commission



Date:

Type:

Fixture:

Project:

Approved:

FCBT690A Wildlife friendly, amber LED exterior die-cast aluminum square top bollard tower with right angle head position. Available in 42" height. Certified by the Florida Fish & Wildlife Conservation Commission for use in areas where protected wildlife exist.

SPECIFICATIONS

PHYSICAL

dimensions	42" H x 8" W x 9" D at lamp (3" D at column)
weight	20 lbs
housing	Marine grade, corrosion resistant, heavy guage aluminum
lens	Impact resistant, UV stabilized, opal, polycarbonate diffuser
mounting	Heavy wall base bracketing for bollard installation provides a unique mounting solution, so the tower body anchors flush to the ground without the appearance of a base plate, anchor bolts included
ingress protection	IP65: dry, damp or wet locations
finish	Available in Black, Bronze, Graphite Grey, Silver, White and Custom Colors. Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18µm Min., 5,000 hour salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.

PERFORMANCE

color temperature	AMBER (no illumination below 560nm wavelength)
lumen output	500 lm
lumen maintenance	L70 >70,000 hours
color consistency	3 SDCM / Standard: 85 CRI
operating temperature	-13°F to 104°F (-25°C to 40°C), start up: -13°F to 104°F (-25°C to 40°C), storage: -40°F to 176°F (-40°C to 80°C)
warranty	5-Year limited warranty

ELECTRICAL

input voltage	Universal 120 - 277 VAC
power supply	Integral
certification	ETL / cETL Listed; Wildlife Friendly Lighting Certification #2018-049
standards	UL 1598 / CSA C22.2 No. 250.0 - Class I / IES LM-79 / LM-80
power consumption	10.5W @ 120 - 277 VAC



Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.



US Commercial Lighting Manufacturer Since 1982

Specification Sheet



Ordering Information

ORDERING INFORMATION

FCBT690A	UNV	42	AM	5L		
SERIES	VOLTAGE	HEIGHT	CCT	LUMENS	FINISH	OPTIONS
FCBT690A	UNV UNV 120 - 277 VAC	42 42"	AM Amber	5L 500 lm (10.5W)	BKE Black BRE Bronze GRE Graphite Grey SLE Silver WHE White CCE Custom Color	SP Surge Protector HS 180° House Side Shield LAB¹ Less Anchor Bolt Kit - for shipment separate of Anchor Bolt Kit

ANCHOR BOLT KITS

A00690

Anchor Bolt Kit - Complete Anchor Bolt Kit shipped in advance of fixture.

¹ **Note:** Fixture must be mounted into FC Lighting supplied Anchor Bolt Kit shipped with or separate of fixture.

Consult Factory for other options and configurations.

To ensure you receive proper configurations for your lighting specifications, contact us directly about any unique application requirements. This may include but not be limited to lumen output, mounting needs, or electrical requirements.

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.




US Commercial Lighting Manufacturer Since 1982

Specification Sheet



Physical


PRODUCT DIMENSIONS - STANDARD PRODUCT

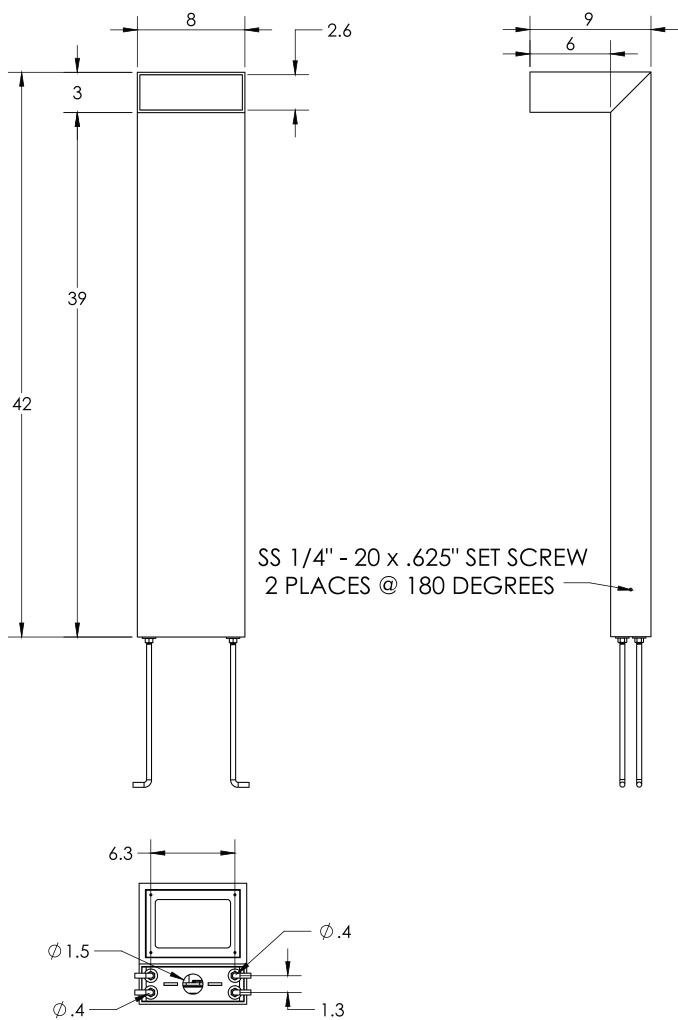

MOUNTING

Mounting Plate Size	7.6" x 3"
Anchor Bolt Template Assembly	A00690

(Includes the below items listed)

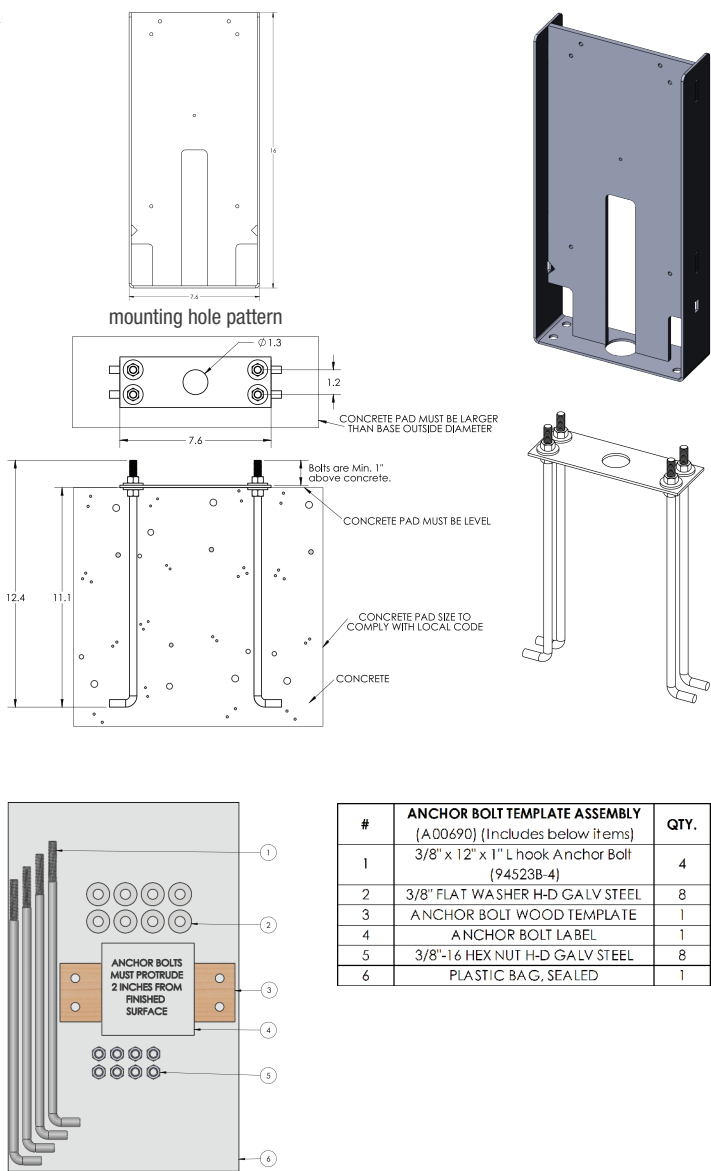

#	ANCHOR BOLT TEMPLATE ASSEMBLY (A00690) (Includes below items)	QTY.
1	3/8" x 12" x 1" L hook Anchor Bolt (94523B-4)	4
2	3/8" FLAT WASHER H-D GALV STEEL	8
3	ANCHOR BOLT WOOD TEMPLATE	1
4	ANCHOR BOLT LABEL	1
5	3/8"-16 HEX NUT H-D GALV STEEL	8
6	PLASTIC B.A.G, SEALED	1

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

© FC Lighting 3609 Swenson Ave. • St. Charles, IL • 60174 | fclighting.com | 800.900.1730



Specification Sheet

AG-DM-082823



Photometry


OPTICAL DISTRIBUTION

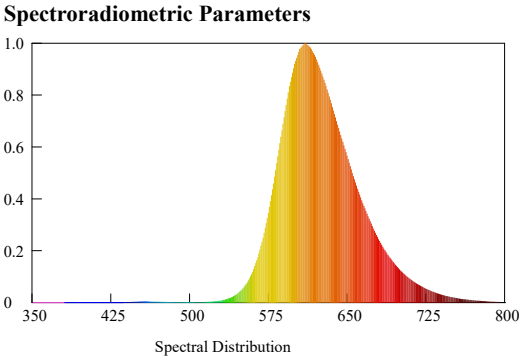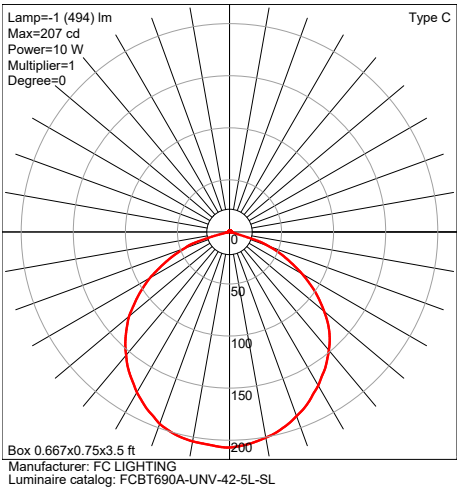

OPTIONS

FIND IES FILES ON FCLIGHTING.COM

HS - 180° House Side Shield

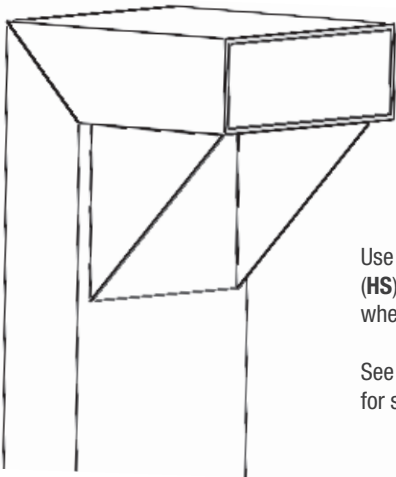

Use the 180° House Side Shield (HS) to protect beach side areas where fixtures are installed.

See wildlife fixture regulations for specific requirements.

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to FC Lighting terms and conditions.



US Commercial Lighting Manufacturer Since 1982

© FC Lighting

3609 Swenson Ave. • St. Charles, IL • 60174 | fclighting.com | 800.900.1730

Specification Sheet

AG-DM-082823