

FCC914 Down Only Pendant, Standard Drivers

9" Slope pendant mount down cylinder outdoor



FEATURES

- Up to 5000 lm, Up to 100 LPW
- Numerous mounting capabilities
- Clear anti-glare tempered glass lens (IK09)
- Multiple color finishes
- 0-10V 1% Dimming (Standard)
- 1.5G Vibration Tested
- 93 CRI with 2 SDCM

PERFORMANCE

Beam Spread: 15° | 25° | 40° | 50° | 72°
CCT Options: 2700K | 3000K | 3500K | 4000K
CRI: 93 CRI
Consistency: 2 SDCM (Fixture to Fixture)
Lumens: 3000-5000 lm
Lifetime: > 70,000 hours / L70 or better

PHYSICAL


Mounting: Mounts directly to standard recessed junction box with wall mount or twist-lock canopy. Additional holes allow unit to be attached directly to mounting surface.
Ingress Protection: Continuous silicone gasket to seal out contaminants, IP65 rated for dry, damp or wet locations.
Finish: Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm Min., 5000hr salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.
Warranty: 5-Year limited warranty (refer to website for details)
Housing: Heavy-walled, extruded aluminum housing with high pressure die-cast lens ring and cap with stainless steel hardware.
Lens: IK09 impact compliant, clear anti-glare tempered glass
Vibration Resistance: Compliant with 1.5G ANSI C136.31, Seismic rated AC-156
Weight: 8-12 lbs (Depending on Length)
Operating Temperature:

ELECTRICAL

Voltage: Universal 120–277V AC standard, 347V optional
Power Supply: Integral Class II, electronic high-power factor >.90, THD < 20%, FCC Title 47 Part 15 Class A. EldoLED & Lutron optional
Power Consumption: Up to 5000 lm
Dimming: **Standard:** 0-10V, 1% Dimming
Certification: CEC Title 24 - JAB Compliant (93 CRI Only)
Standards: cETLus Listed, CE, NOM, and RoHS Compliant. Wet location listed for wall or ceiling mount IP65 Ingress protection. 1.5G (ANSI C136.31) Vibration resistance rated. IK09 (IEC6226) Impact resistance rated. IESNA LM79 Photometric testing by NVLAP accredited test lab. IESNA LM80 LED testing by NVLAP accredited test lab. IESNA TM21 Luminaire lumen depreciation projection to >70,000hrs.

PHYSICAL DIMENSIONS

Fixture	Length (H)
FCC914	14" Height

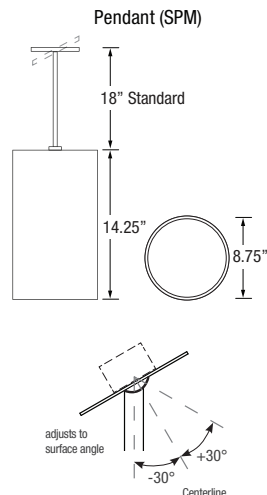

Date: _____
 Type: _____
 Fixture: _____
 Project: _____

Approved: _____

FCC914 Down Only Pendant, Standard Drivers

PRODUCT CODE

EXAMPLE: FCC9-14-SPM-18-UNV-927-30L-BKE-15-LD-N/A

MODEL	HEIGHT	MOUNTING	SUSP. LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	OPTIC	DIMMING	OPTIONS	BATTERY
FCC9											

<p>MODEL FCC9</p> <p>HEIGHT 14 14" Height</p> <p>MOUNTING SPM Slope Pendant</p> <p>SPM LENGTH Specify the optional suspension length in inches. (Top of fixture to ceiling) (SPM 18" Standard, 4"-120" Max; 61"-120" w/LD & ET Only and stem comes in 2 sections) *Consult factory & price guide for other lengths.</p> <p>VOLTAGE UNV Universal 120-277 Volt AC 347V 347 Volt AC</p>	<p>COLOR</p> <p>927 (93CRI) 2700K 930 (93CRI) 3000K 935 (93CRI) 3500K 940 (93CRI) 4000K</p> <p>LUMENS nominal</p> <p>30L 3000 lm 40L 4000 lm 50L 5000 lm</p> <p>FINISH</p> <p>BKE Black (AAMA 2604) BRE Bronze (AAMA 2604) GRE Graphite Grey (AAMA 2604) SLE Silver (AAMA 2604) WHE White (AAMA 2604) CCE Custom Color (AAMA 2604)</p>	<p>OPTIC nominal</p> <p>15 Spot (15°) 25 Narrow Flood (25°) 40 Mid Flood (40°) 50 Flood (50°) 72 Wide Flood (72°)</p> <p>w/SOFT FIELD N/A (Leave Blank)</p> <p>DIMMING LD 0-10V Dimming (Standard)</p> <p>OPTIONS N/A (Leave Blank)</p> <p>BATTERY N/A (Leave Blank)</p>
--	--	--

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting, Inc. reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC Lighting, Inc. terms and conditions. All stated specifications have a tolerance of +/- 7%.



FCC914 Down Only Pendant, Standard Drivers

LUMENS nominal

Model	Watts	940
FCC9	60 W (Max)	3000 lm 4000 lm 5000 lm





IES Multiplier	
Color	Multiplier
927	0.93
930	0.97
935	0.99
940	1.00

*83CRI±1.15 Consult factory.

TRIAC & ELV Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Glyder GLV-600
	Diva DVLV-600P
	Diva DV-600P
	Diva DVELV-600P(303)
	Maestro MALV-600
	Nova T NT-1000
	Nova T NTELV-600
Leviton	SureSlide 6633
	Illumatech IPE04

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	Illumatech 010-IP710-DLZ

PHOTOMETRICS

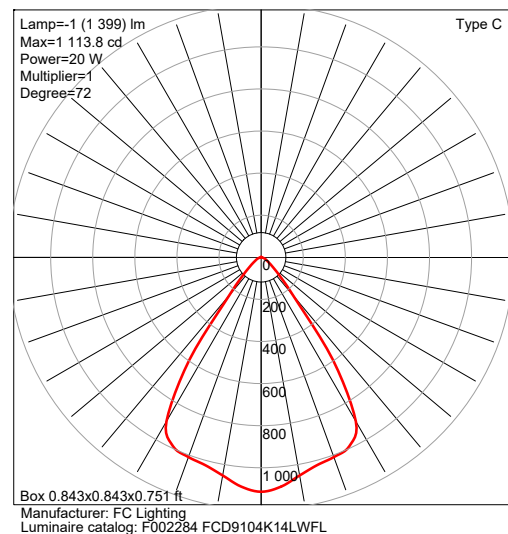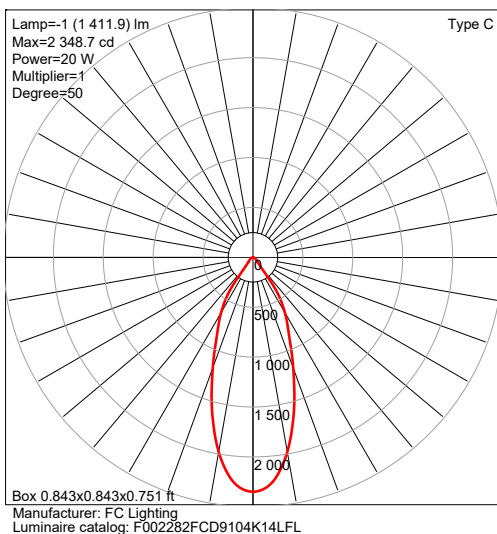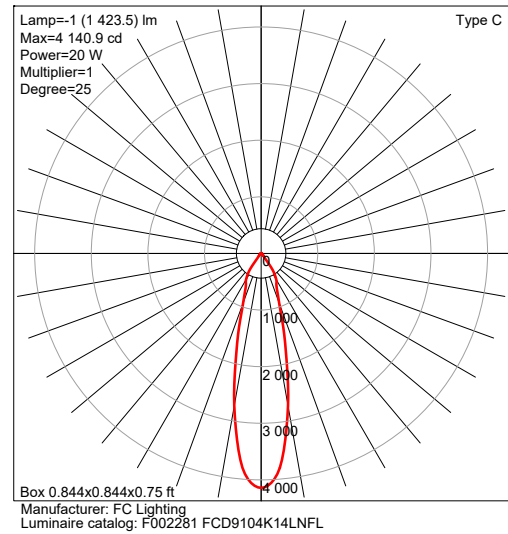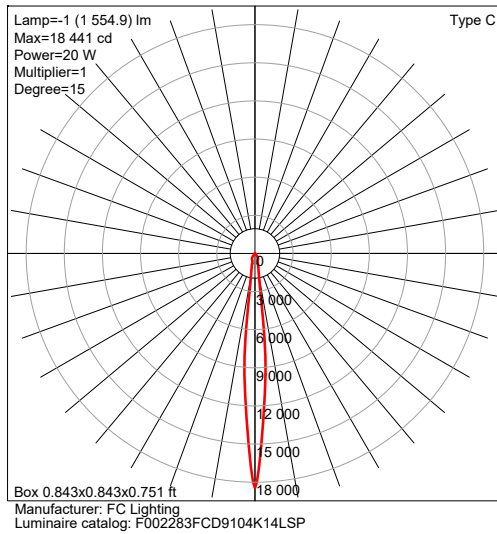

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting, Inc. reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC Lighting, Inc. terms and conditions. All stated specifications have a tolerance of +/- 7%.

