

Date: _____

Type: _____

Fixture: _____

Project: _____

Approved:

FCSL108



FCSL108 IP65 rated exterior stainless steel brick step light with open lens for masonry applications. Corrosion resistant, die-cast aluminum housing construction, this fixture provides illumination for damp, dry or wet areas.



SPECIFICATIONS

PHYSICAL	
lengths/dimensions	9.5" W x 2.83" H x 3" D
weight	2 lbs
housing	Marine grade, corrosion resistant, stainless steel
lens	White glass lens
mounting	Concrete pour, masonry applications
ingress protection	IP65 : Dry, damp or wet locations with extruded silicone gasket to seal out contaminants
faceplate finish	Marine grade stainless steel

PERFORMANCE					
color temperature	2700K	3000K	3500K	4000K	
lumen output	340 lm with white lens				
lifetime	> 70,000 hours / L70 or better				
color consistency	3 SDCM / 85 CRI				
junction temperature	73°C @ T ^a 25°C				
warranty	5-Year limited warranty (refer to website for details)				

ELECTRICAL	
input voltage	Universal 120–277V AC
power supply	integral Class II, electronic high-power factor > 94% @120V
certifications	ETL / cETL Listed ADA compliant
standards	UL1598/CSA C22.2 No. 250.0; UL 8750/CSA C22.2 No. 250.13/IES LM-79/LM-80
power consumption	10W @ 120V - 277V
dimming	0-10V (10%)

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

Specification Sheet



Ordering Information

PART NUMBER												
FCSL108				CRI85		3L		SS				
SERIES	VOLTAGE		CCT		CRI		LUMENS		FINISH		OPTIONS	
FCSL108	120V	120V	27K	2700K	CRI85	85 CRI	3L	340 lm (10W)	SS	Stainless Steel	LD	0-10V Dimming (Standard)
	277V	277V	3K	3000K							HB	Hanger Bracket
	UNV	120V-277V	35K	3500K							LBB	Less Back Box (for shipment separate of Back Box)
			4K	4000K								

BACK BOX KITS	
H99001-ETL	Back Box Kit - Complete Back Box shipped in advance of fixture without mounting kit.

Consult Factory for other options and configurations.

To ensure you receive proper configurations for your lighting specifications, contact us directly about any unique application requirements. This may include but not be limited to lumen output, mounting needs, or electrical requirements.

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC terms and conditions.

 US Commercial Lighting Manufacturer Since 1982

© FC Lighting 3609 Swenson Ave. • St. Charles, IL • 60174 | fcighting.com | 800.900.1730

Specification Sheet

JO-DM-041323



Dimensions

PRODUCT DIMENSIONS - STANDARD PRODUCT		MOUNTING - <i>j-box sold by others</i>	
width	9.5" W	back box width	9.375" W
height	2.83" H	back box height	2.64" H
depth	3" D	back box depth	3" D

3 in

9.5 in

2.83 in

9.375"

3"

Back Box Housing

2.64"

(2) 7/8" connector knockouts

back box mounts inside brick masonry: faceplate flush to surface or in front of surface - see installation instructions for proper mounting directions

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC terms and conditions.




Photometry

OPTICAL DISTRIBUTION

lumen output	341 lm @ 4000K
power consumption	10W
lens	opal glass

illuminations testing labroatory: Report #2037

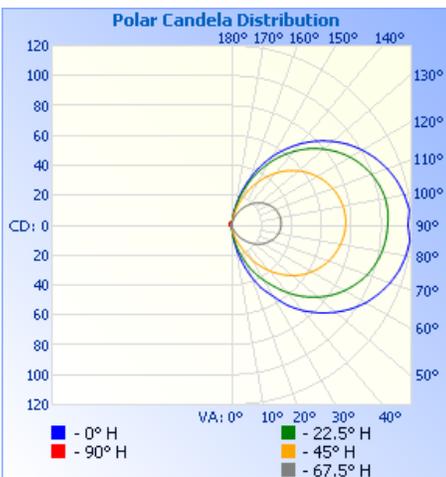

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7R	0.12 fc	5.2 ft	5.1 ft
3.3R	0.03 fc	10.1 ft	9.8 ft
5.0R	0.01 fc	15.3 ft	14.9 ft
6.7R	0.01 fc	20.5 ft	19.9 ft
8.3R	0.01 fc	25.4 ft	24.7 ft
10.0R	0.00 fc	30.6 ft	29.7 ft

■ Vert. Spread: 113.6°
■ Horiz. Spread: 112.2°

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC terms and conditions.

US Commercial Lighting Manufacturer Since 1982

Specification Sheet