


Industry's Largest
Trimless Offering

World Class
Durability

World Class
Easy Install

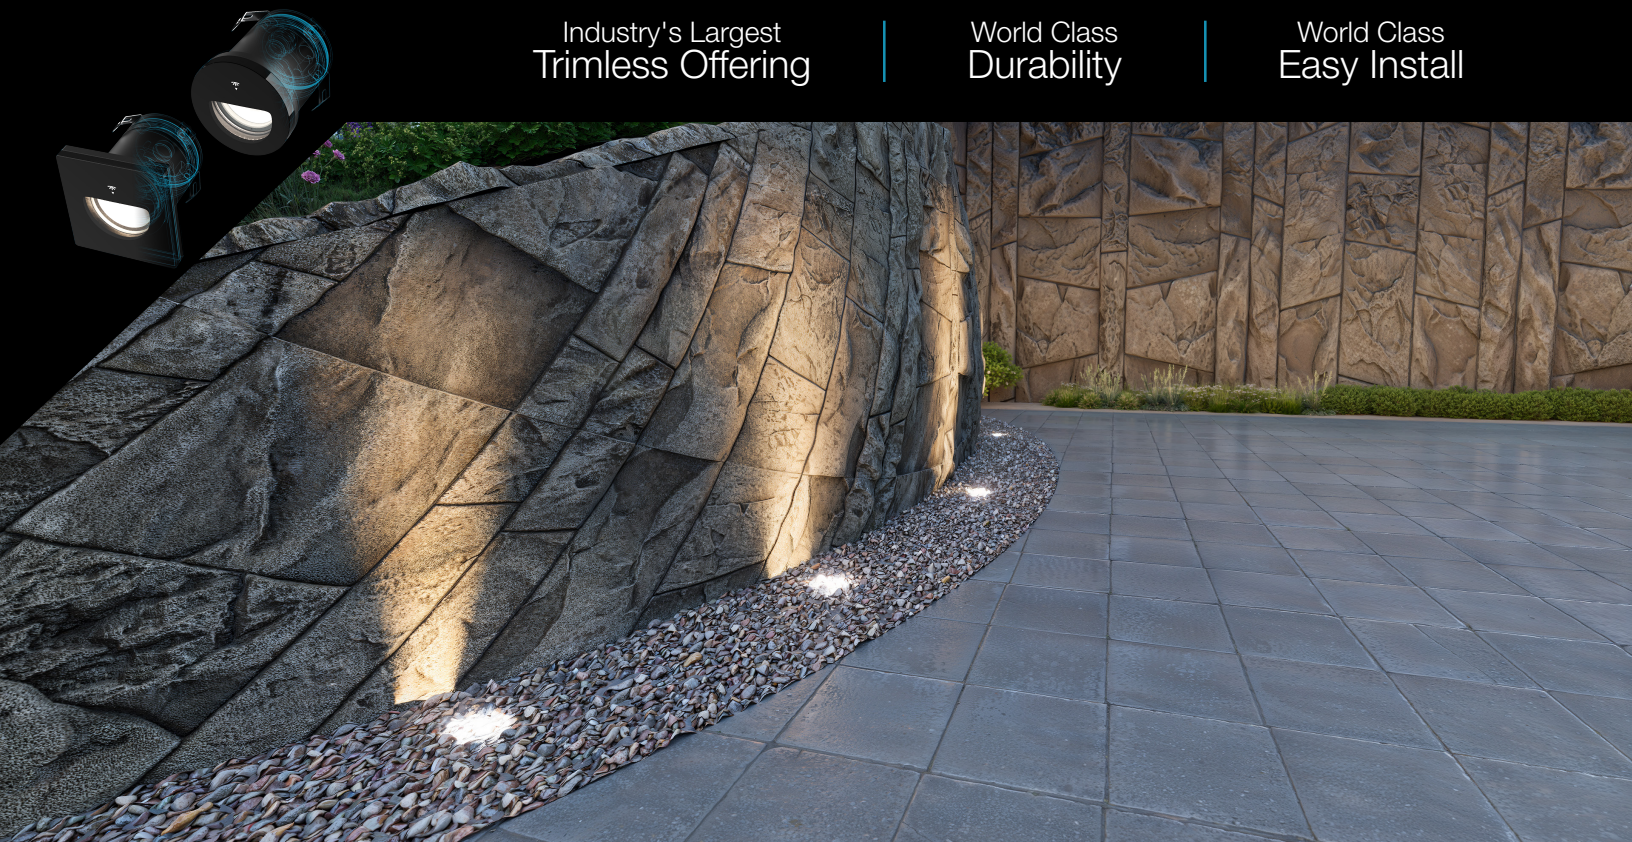

Features

Dimensions	2.52" x 2.99" 3.15" x 3.23" 3.86" x 3.35"
Input Voltage	24VDC, Optional: UNV (120-277 VAC)
Power Consumption	3W - 9W
Color	2700K, 3000K, 3500K, 4000K 93 CRI (Standard)
Lumen Output	200 lm - 500 lm
Beam Spread	ASY1: Asymmetrical (21-22° x 23-27°, Tilt 3-5°) ASY2: Asymmetrical (35-38° x 54-65°, Tilt 20-22°)



Industry's Largest Trimless Offering

200,000+ Fixture
Combinations

One Family, Limitless
Solutions

World Class Durability Package

IP66, IP67, IP68,
IP69K

IK10 Max Impact
Resistance

2,200 lb Heavy Duty
Walkover

World Class Easy Install Package

Field Wirable IP68
Connection System

Toolless Lever-Lock
Termination Method

LUMEN DATA

ROUND

Model	Size	Wattage	Lumens
FCI-T250R	2.50" (64mm)	05W	300
		03W	200
FCI-T300R	3.00" (80mm)	07W	400
		05W	350
FCI-T375R	3.75" (98mm)	09W	500
		07W	400

SQUARE

Model	Size	Wattage	Lumens
FCI-T250S	2.50" (64mm)	05W	300
		03W	200
FCI-T300S	3.00" (80mm)	07W	400
		05W	350
FCI-T375S	3.75" (98mm)	09W	500
		07W	400

OPTICAL DISTRIBUTION

