

FCI-TXXXR(S)-NAD (Non-adjustable Series)



Internal Glare Shielding

Flush Zero-Sightline Design

World Class Durability Package

- IP66, IP67, IP68, IP69K
- IK10 Max Impact Resistance
- 2,200 lb Heavy Duty Walkover

World Class Easy Install Package

- Field Wireable IP68 Connection System
- Toolless Lever-Lock Termination Method

SPECIFICATIONS

PHYSICAL


dimensions	Luminaire: (FCI-T175R/S) Ø 1.77" x 2.48" D, (FCI-T250R/S) Ø 2.52" x 2.99" D, (FCI-T300R/S) Ø 3.15" x 3.23" D, (FCI-T375R/S) Ø 3.86" x 3.35" D Well Housing: (See drawings on pages 5 and 6.)
housing	Luminaire: Fully silicone high temperature potted, marine grade, corrosion-resistant, heavy-walled, solid low copper alloy, precision CNC body with with silicone seals. Protected by a captive Nickel Plated Aluminum Alloy perimeter flush wall with no visible fasteners for a clean aesthetics. Well Housing: High-strength, heavy-walled PVC polymeric material featuring UL 746C f1 UV protection and a UL94 5VA flame rating.
lens	Heavy-gauge, thick, tempered low-iron high-transmission glass lens, IK10 (IEC 62262) impact-resistant. Optional: Internal anti-glare optical accessories.
mounting	Pavement, concrete, sand, soil
ingress protection	Luminaire is IP66, IP67, IP68, and IP69K rated (IEC 60529) to withstand water, moisture, and high-pressure jet washdowns. ETL Listed for dry, damp or wet locations. Cabling is anti-siphon (standard) with IP68 waterproof connection systems available as an optional accessory.
impact resistance	IK10 (IEC 62262) impact-resistant for all models and sizes. Heavy-Duty walk over compliant up to 1000 kg (approximately 2,204 lbs).
finish	Housing is chemically cleaned, e-coated, and processed through a 7-stage pretreatment wash before application of UV-resistant, super-durable polyester powder coat at a minimum 18 µm dry-film thickness. Finish withstands a minimum 5,000 hour salt spray test per ASTM B117 and complies with AAMA 2604 and Florida requirements for superior corrosion resistance and weatherability.

PERFORMANCE

color	2700K, 3000K, 3500K, 4000K - 93 CRI (standard)
lumen output	100 lm - 800 lm
beam spread	NSP, SP, NFL, FL, WFL, WW Note: Beam angle options vary by size, see IES files for specific beam angles.
lumen maintenance	L70 > 100,000 hours
operating temperature	-22°F to 122°F (-30°C to 50°C)
warranty	5-Year limited warranty

ELECTRICAL

input voltage	24 VDC, Optional: UNV (120 - 277 VAC) (includes well housing driver)
power consumption	1W - 9W
power supply	Remote driver or well housing integral for UNV models.
certification	ETL
standards	UL1598 / CSA C22.2 No. 250.0 - Class I / IES LM-79 / LM-80
dimming	Both 24 VDC with REMOTE POWER and UNV Models are Tri-Dim (1%, 0-10V, 120 - 277 VAC), (1%, TRIAC & ELV, 120 VAC Only) standard.
cabling	Optional direct burial cabling options for 24 VDC & UNV available.

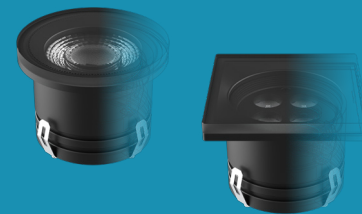

Ordering Information

ORDERING INFORMATION

MODEL	SERIES	VOLTAGE	LIGHT SOURCE	COLOR	POWER (Typical)	OPTICS (Typical)	OPTIC ACCESSORIES (Internal)	DIMMING
FCI-T175R ¹	1.75" (45mm) Round				02W* 2W (180 Lumens) 01W* 1W (100 Lumens)			
FCI250R	2.50" (64mm) Round				05W* 5W (400 Lumens) 03W* 3W (250 Lumens)			
FCI-T300R	3.00" (80mm) Round				07W 7W (650 Lumens) 05W* 5W (450 Lumens)			
FCI-T375R	3.75" (98mm) Round				09W 9W (800 Lumens) 07W 7W (650 Lumens)			
FCI-T175S ¹	1.75" (45mm) Square				02W* 2W (180 Lumens) 01W* 1W (100 Lumens)			
FCI-T250S	2.50" (64mm) Square				05W* 5W (400 Lumens) 03W* 3W (250 Lumens)			
FCI-T300S	3.00" (80mm) Square				07W 7W (650 Lumens) 05W* 5W (450 Lumens)			
FCI-T375S	3.75" (98mm) Square				09W 9W (800 Lumens) 07W 7W (650 Lumens)			
	NAD	Non-adjustable	24VDC 24 VDC UNV 120 - 277 VAC ¹ UNV not available for FCI-T175R & FCI-T175S sizes.	COB Chip on Board LED** SMD LED Discrete	927 93 CRI, 2700K 930 93 CRI, 3000K 935 93 CRI, 3500K 940 93 CRI, 4000K	NSP Narrow Spot SP Spot NFL Narrow Flood FL Flood WFL Wide Flood WW Wall Wash	CV Cut Off Visor HC Honey Comb Louver RV Radar Visor TV Tri-Blade Visor DC Double Crescent Visor LV Louvers CB Crescent Blade Visor SCV Single Crescent Visor RSN Raised Snoot TVL Triple Louver	TD*** Tri-Dim (1%, 0-10V, 120 - 277 VAC), (1%, TRIAC & ELV, 120 VAC Only)

Note: See IES files for specific beam angles.

Note: Optical Accessories only available on certain light source types. See optical accessory illustration key on page 3.

*Note: Remote drivers require a minimum of 6W for startup, i.e. two 5W units minimum. See page 3 for driver specifications.

**Note: LED Option available for NSP Option Only and required on all FCI-T175R & FCI-T175S Models. LED Optical Accessories only available on FCI-T300 & FCI-T375 sizes.

***Note: TD Option with 24VDC requires REMOTE 24VDC POWER Options. Leave blank if no UNV or REMOTE 24VDC is selected, function will be no dimming (ON/OFF).

Note: Lumen output typical based on 940 color & SP optic, see IES files for complete details.





Ordering Information

DRIVERS

INTERIOR - REMOTE 24VDC POWER OPTIONS – Dry, Damp, Wet Location UL Listed

Dimming TD Standard - Tri-Dim (1%, 0-10V, 120 - 277 VAC), (1%, TRIAC & ELV, 120 VAC Only)

_____ DRR-UNV-24VDC-30W-TD

_____ DRR-UNV-24VDC-60W-TD

_____ DRR-UNV-24VDC-96W-TD

EXTERIOR - REMOTE 24VDC POWER OPTIONS – IP66, IP67, IP69 UL Listed

Dimming TD Standard - Tri-Dim (1%, 0-10V, 120 - 277 VAC), (1%, TRIAC & ELV, 120 VAC Only)

_____ DRX-UNV-24VDC-30W-TD

_____ DRX-UNV-24VDC-60W-TD

_____ DRX-UNV-24VDC-96W-TD

ACCESSORIES (Order separately. Indicate the quantity needed for each item. See page 4 for wiring chart and illustration.)

_____ E62902-XX 18AWG 2C UL DIR BUR CABLE (for 24VDC Option) (XX provide feet in length)

_____ E62905-XX 18AWG 5C UL DIR BUR CABLE (for UNV Option) (XX provide feet in length)

_____ ES1 WATERPROOF WIRE NUTS IN BAG (5PCS) (order in Qty's of 5 for 24VDC & UNV options)


_____ EW-P20-2P 24VDC IP68 2-WAY CONNECTOR (only for 24VDC)

_____ EW-P20T-2P 24VDC IP68 3-WAY CONNECTOR (only for 24VDC)


_____ FCI-T-ADJ-TOOL FCI-T-ADJ ADJUSTABLE TOOL (only for FCI-T-ADJ Models)

_____ FCI-T-SUCTION FCI-T-ADJ SUCTION CUP TOOL (for removal/adjustments)

OPTICAL ACCESSORY KEY

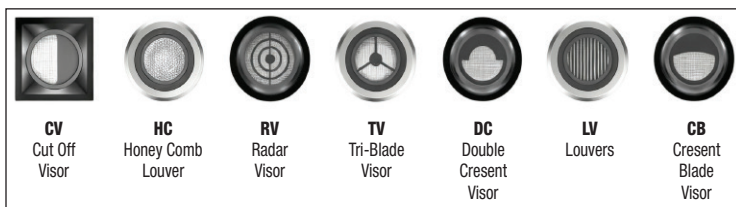


Note: Optical Accessories shown only available on COB Source Types.



Note: Optical Accessories shown only available on FCI-T300 & FCI-T375 LED Source Types.

LIGHT SOURCE	OPTIC ACCESSORIES (INTERNAL)		
	Insert Code	Accessory Name	Multiplier Factor
C O B	CV	Cut Off Visor	0.78
	HC	Honey Comb Louver	0.68
	RV	Radar Visor	0.83
	TV	Tri-Blade Visor	0.88
	DC	Double Crescent Visor	0.63
	LV	Louvers	0.68
	CB	Crescent Blade Visor	0.53
L E D	SCV	Single Crescent Visor	0.78
	RSN	Raised Snoot	0.72
	TLV	Triple Louver	0.55





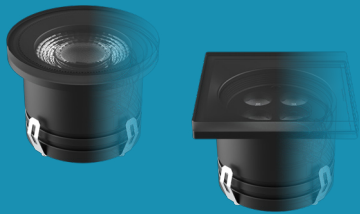

Wiring Information

WIRING CHART AND ILLUSTRATION

MAXIMUM WIRING DISTANCE (Feet)					
WIRE SIZE	10AWG (5.6mm ²)	12AWG (3.3mm ²)	14AWG (2.0mm ²)	16AWG (1.3mm ²)	18AWG (0.78mm ²)
UNV (120 - 277 VAC)	357	210	137	85	54
30W (24VDC)	480	282	185	114	73
60W (24VDC)	300	176	115	71	45
100W (24VDC)	120	71	46	29	18

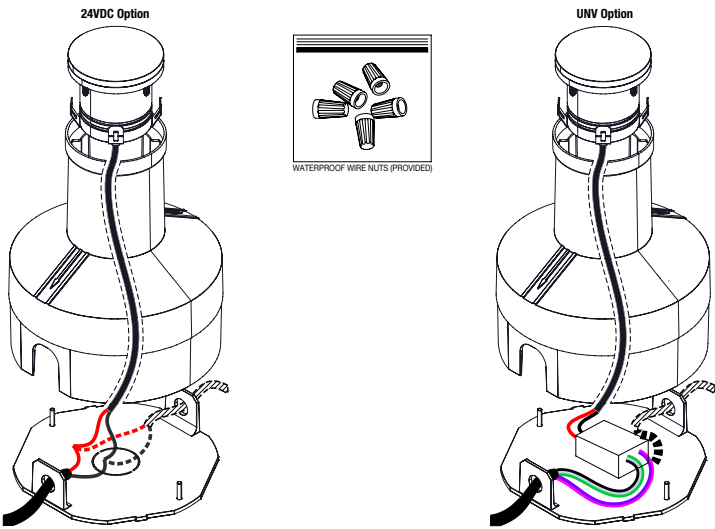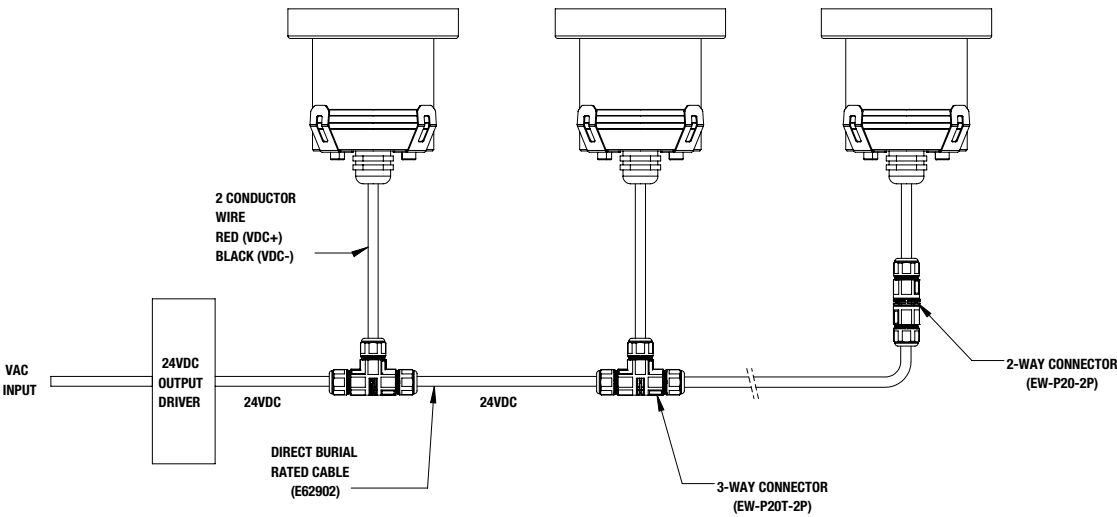

Note: See installation instructions for full details.


Due to continuous development and improvements, specifications are subject to change without notice.

Product use certifies agreement to FC Lighting, Inc. terms and conditions.

© FC Lighting, Inc. 3609 Swenson Ave • St. Charles, IL • 60174 | fclighting.com | 800.900.1730

 US Commercial Lighting Manufacturer Since 1982

AG-DM-072226

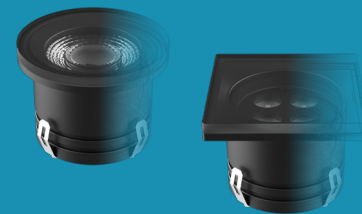


Dimensions


PRODUCT DIMENSIONS - STANDARD PRODUCT

Marine grade aluminum with nickel plated alloy construction.

FCI-T175R/S

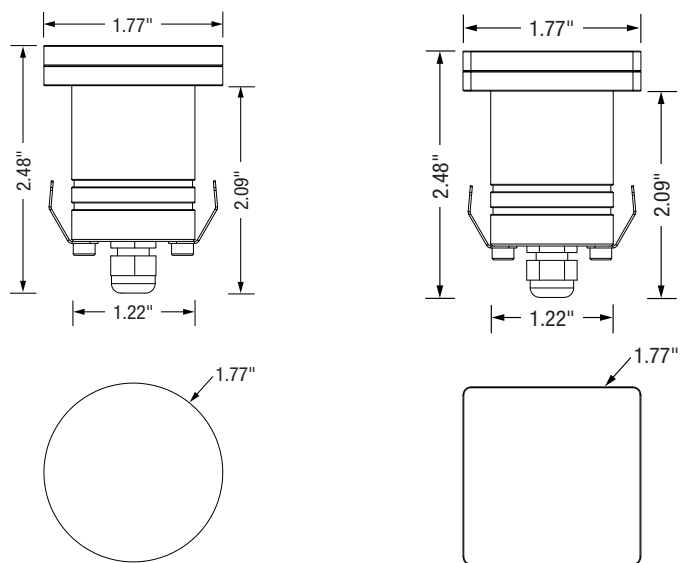


FCI-T250R/S

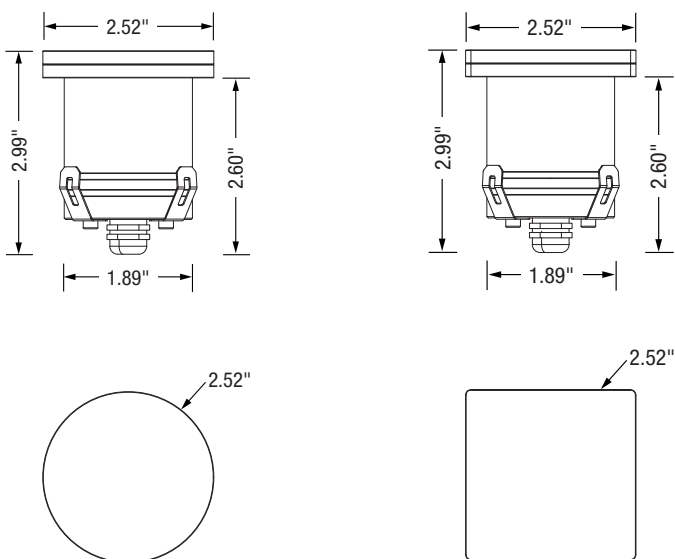


MOUNTING - well housing included, one per luminaire


French drain required for proper installation, see installation instructions.

FCI-T175R/S (Square Models have Square Nickel Plated Alloy Insert)

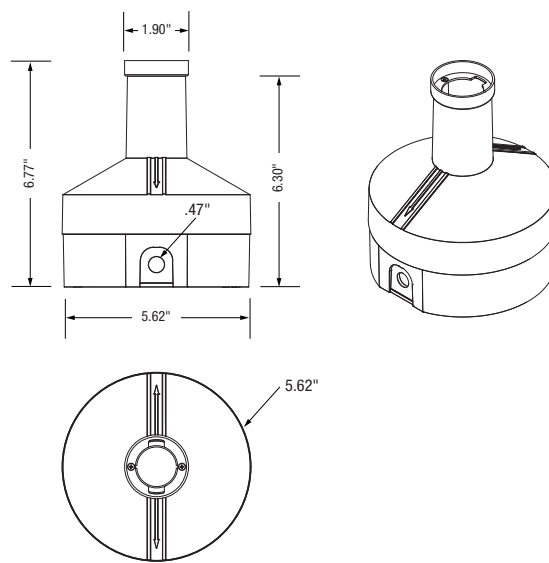

FCI-T250R/S (Square Models have Square Nickel Plated Alloy Insert)

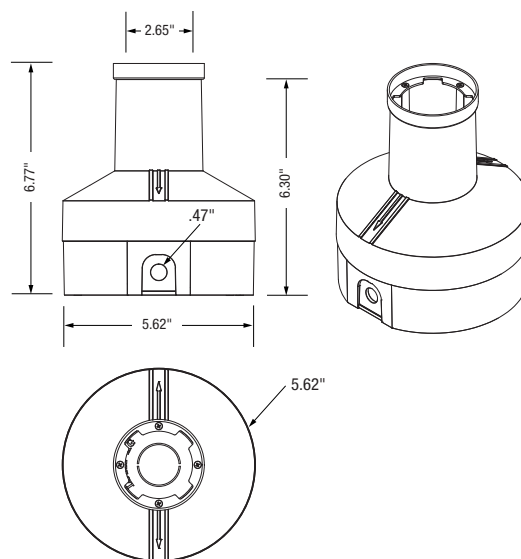

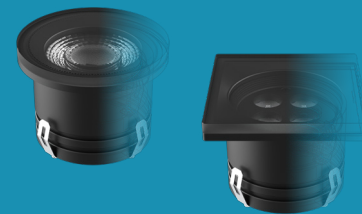


Dimensions


PRODUCT DIMENSIONS - STANDARD PRODUCT

Marine grade aluminum with nickel plated alloy construction.

FCI-T300R/S

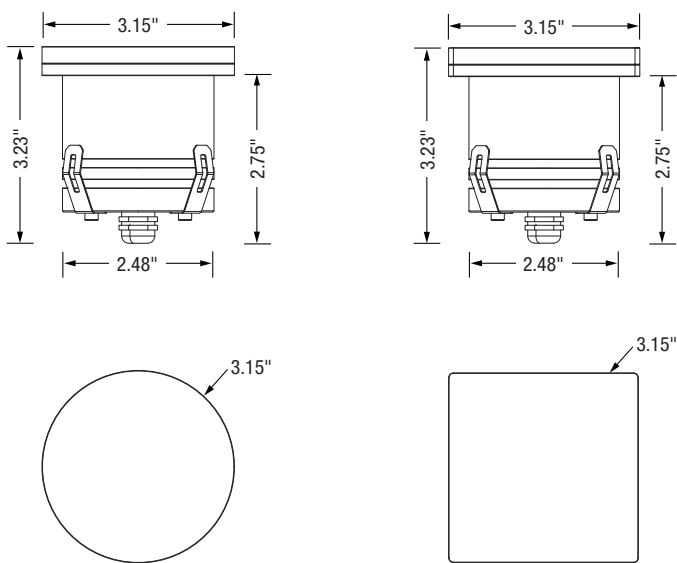


FCI-T375R/S

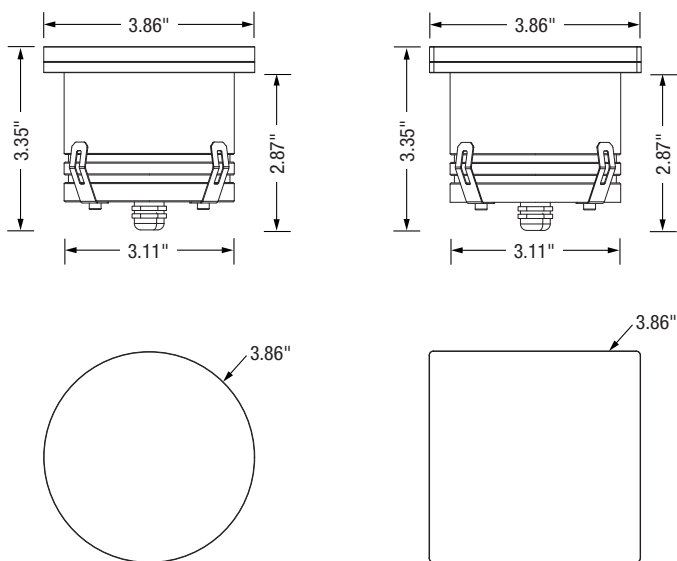


MOUNTING - well housing included, one per luminaire

French drain required for proper installation, see installation instructions.

FCI-T300R/S (Square Models have Square Nickel Plated Alloy Insert)

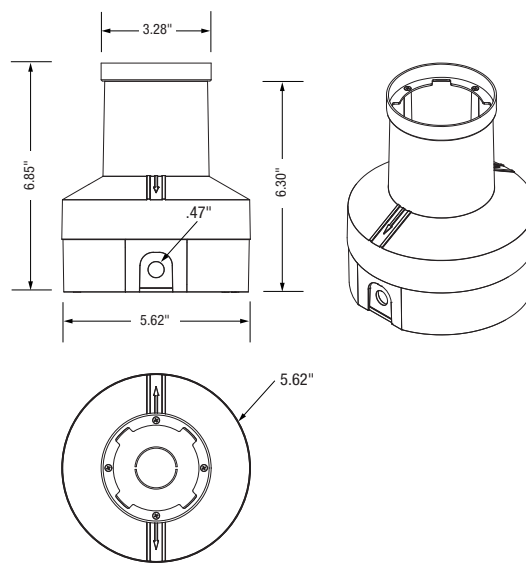

FCI-T375R/S (Square Models have Square Nickel Plated Alloy Insert)

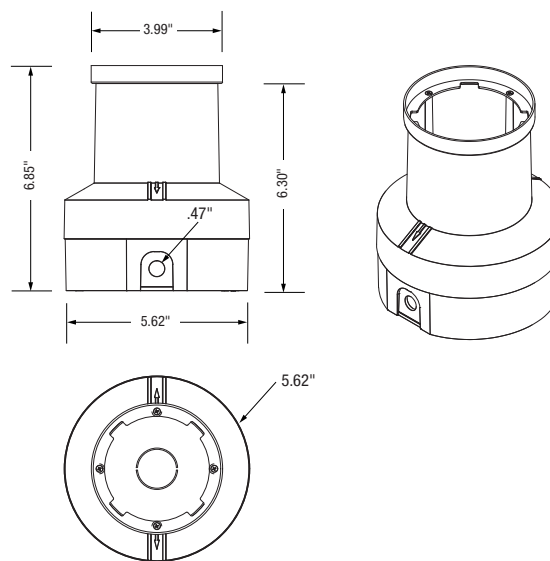



Photometry

OPTICAL DISTRIBUTION - See IES files for complete details.

