

FCW1010, FCW1011, FCW1029, FCW1030 - INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.



FC
LIGHTING

t 800.900.1730 f 630.889.8106
3609 Swenson Ave. St. Charles, IL 60174

DETAILED ILLUSTRATION

GENERAL:

1. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
2. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
3. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
4. These fixtures are intended to be mounted to a 4" outlet box. The box must be directly supported by the building structure.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.

Fixture mounting: (fig 1)

1. Fixture safety is warranted only by proper use of the following instructions: please save them.
2. First remove mounting plate from the fixture by loosening the screws that hold it in place on each side.
3. Make power supply connections.

NOTE: The outer edge of the fixture that comes in contact with the mounting surface must be silicone caulked by the installer. This is critical for a safe and reliable installation.

4. Secure the back plate to the wall with holes provided (hardware by others) to the mounting surface.
5. Install lamp per label requirements. (Lamps are not included.) LED lamping is integral.
6. Replace fixture front to back plate and secure with screws removed in step 2.

Lens installation: (fig 2)

1. Place lens inside housing, nesting on bottom ledge.
2. Place Z-brackets onto studs. Position foam on lens surface.
3. Use threaded tubular fasteners provided to secure into place.

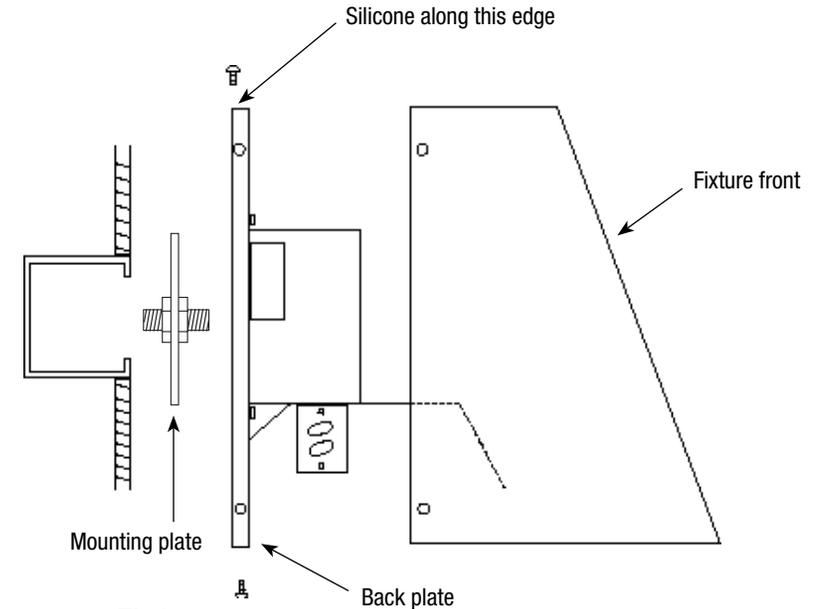


Fig1

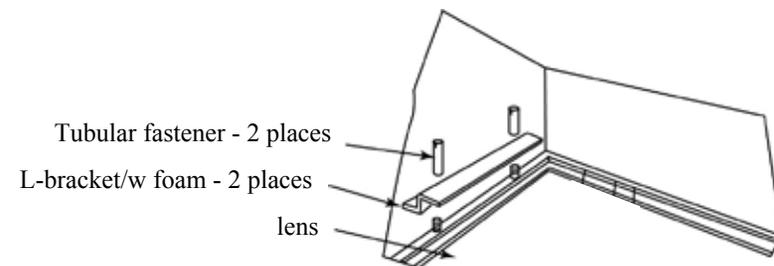


Fig 2