



Date: _____
 Type: _____
 Luminaire: _____
 Project: _____

Approved: _____

VEIL Luminaire (FCWV)



VEIL is a low-profile luminaire that produces a line of light to highlight architectural details, such as window mullions, and enhance the depth of space. The minimal design allows the luminaire to blend into the architecture while producing stunning lighting effects on window frames and mullions. The rugged design, and IP65 and IK08 ratings, make it perfect for exterior installations. (See page 2 for an application rendering.)



SPECIFICATIONS

PHYSICAL

WC

length/dimension	2.87" H x 2.44" W x 1.77" D
housing	Marine grade, corrosion-resistant, high pressure cast aluminum
lens	Polycarbonate
mounting	Surface
ingress protection	IP65 Rated for dry, damp or wet locations
impact resistance	IK08
construction	AL6063 aluminum body
finish	The housing is cleaned, anodized, and then goes through a 7-stage wash cycle. The part is degassed before being coated with a UV-resistant, super durable poly for a 5,000-hour salt spray rating. An optional e-coat is available for extended salt spray requirements; consult the factory.

PERFORMANCE

WC

color temperature	2700K, 3000K, 3500K, 4000K
lumen output	377 lm
beam spread	3°x 170°
lumen maintenance	L70 > 70,000 hours
operating temperature	-4°F to 122°F (-20°C to 50°C)
warranty	5-Year limited warranty

ELECTRICAL

input voltage	24 VDC
power consumption	4W
power supply	Remote driver
certification	ETL/cETL Listed
standards	UL1598 / CSA C22.2 No. 250.0 - Class I / IES LM-79 / LM-80

WC = World Class Features



Ordering Information

ORDERING INFORMATION

FCWV	24		04W	CRI90	BKE	3170					
SERIES	VOLTAGE		CCT		POWER		CRI	FINISH	OPTICS	OPTIONS	
FCWV	24	24 VDC	27K	2700K	*04W	4 Watts	CRI90	90 CRI	BKE	Black	3170 3°x170°
			3K	3000K							
			35K	3500K							
			4K	4000K							
			5K	5000K							

*Note: Remote drivers require a minimum of 6W for startup, i.e. three 2W units minimum.

INTERIOR - REMOTE 24VDC POWER OPTIONS – Dry, Damp, Wet Location UL Listed

- DRR-UNV-24VDC-30W-TD
- DRR-UNV-24VDC-60W-TD
- DRR-UNV-24VDC-90W-TD

EXTERIOR - REMOTE 24VDC POWER OPTIONS – IP66, IP67, IP69 UL Listed

- DRX-UNV-24VDC-30W-TD
- DRX-UNV-24VDC-60W-TD
- DRX-UNV-24VDC-90W-TD






Dimensions

PRODUCT DIMENSIONS - STANDARD PRODUCT

height	2.87" H
width	2.44" W
depth	1.77" D

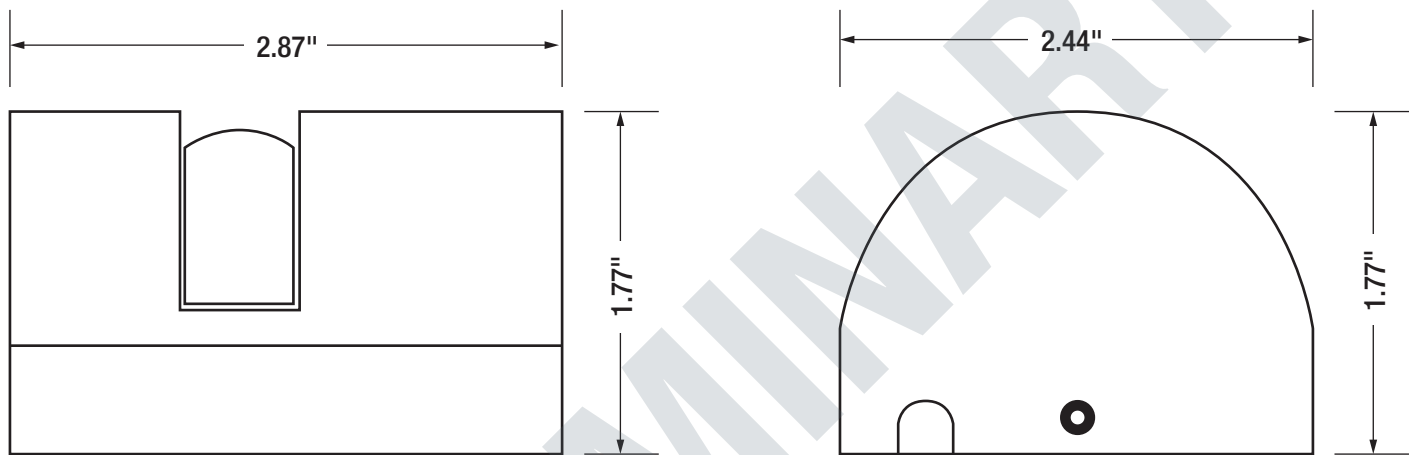

Note: Drawing is shown at actual size.