

Industry's Largest
Trimless Offering

World Class
Durability

World Class
Easy Install



Features

Dimensions	1.77" x 2.48" 2.52" x 2.99" 3.15" x 3.25" 3.86" x 3.35"
Input Voltage	24VDC, Optional: UNV (120-277 VAC)
Power Consumption	1W - 9W
Color	2700K, 3000K, 3500K, 4000K 93 CRI (Standard)
Lumen Output	100 lm - 800 lm



NSP
Narrow
Spot (7°)



SP
Spot (18°)



NFL
Narrow
Flood (24°)



FL
Flood (36°)



WFL
Wide
Flood (60°)



WW
Wall Wash
(20° x 55°)

Note: Beam angle options vary by size, see IES files for specific beam angles

Industry's Largest Trimless Offering

200,000+ Fixture
Combinations

One Family, Limitless
Solutions

World Class Durability Package

IP66, IP67, IP68,
IP69K

IK10 Max Impact
Resistance

2,200 lb Heavy Duty
Walkover

World Class Easy Install Package

Field Wirable IP68
Connection System

Toolless Lever-Lock
Termination Method

LUMEN DATA



ROUND

Model	Size	Wattage	Lumens
FCI-T175R	1.75" (45mm)	02W	180
		01W	100
FCI-T250R	2.50" (64mm)	05W	400
		03W	250
FCI-T300R	3.00" (80mm)	07W	650
		05W	450
FCI-T375R	3.75" (98mm)	09W	800
		07W	650

SQUARE




Model	Size	Wattage	Lumens
FCI-T175S	1.75" (45mm)	02W	180
		01W	100
FCI-T250S	2.50" (64mm)	05W	400
		03W	250
FCI-T300S	3.00" (80mm)	07W	650
		05W	450
FCI-T375S	3.75" (98mm)	09W	800
		07W	650

OPTICAL DISTRIBUTION

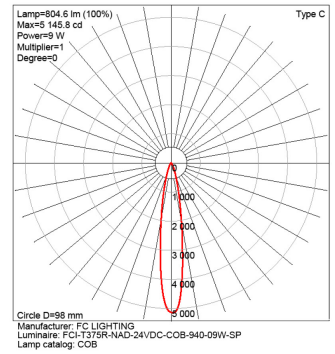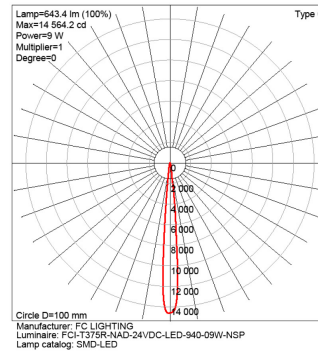

OPTICAL ACCESSORY KEY

COB Source Types

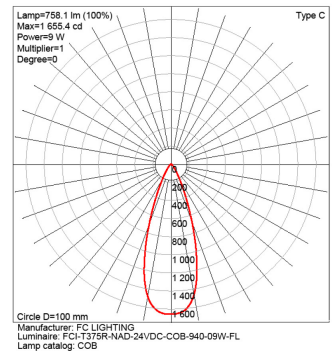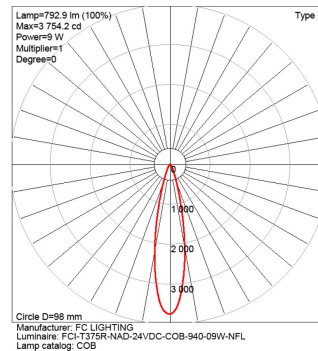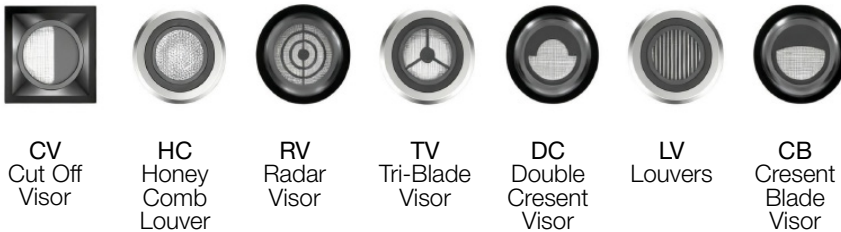

LED Source Types

