


Industry's Largest
Trimless Offering

World Class
Durability

World Class
Easy Install

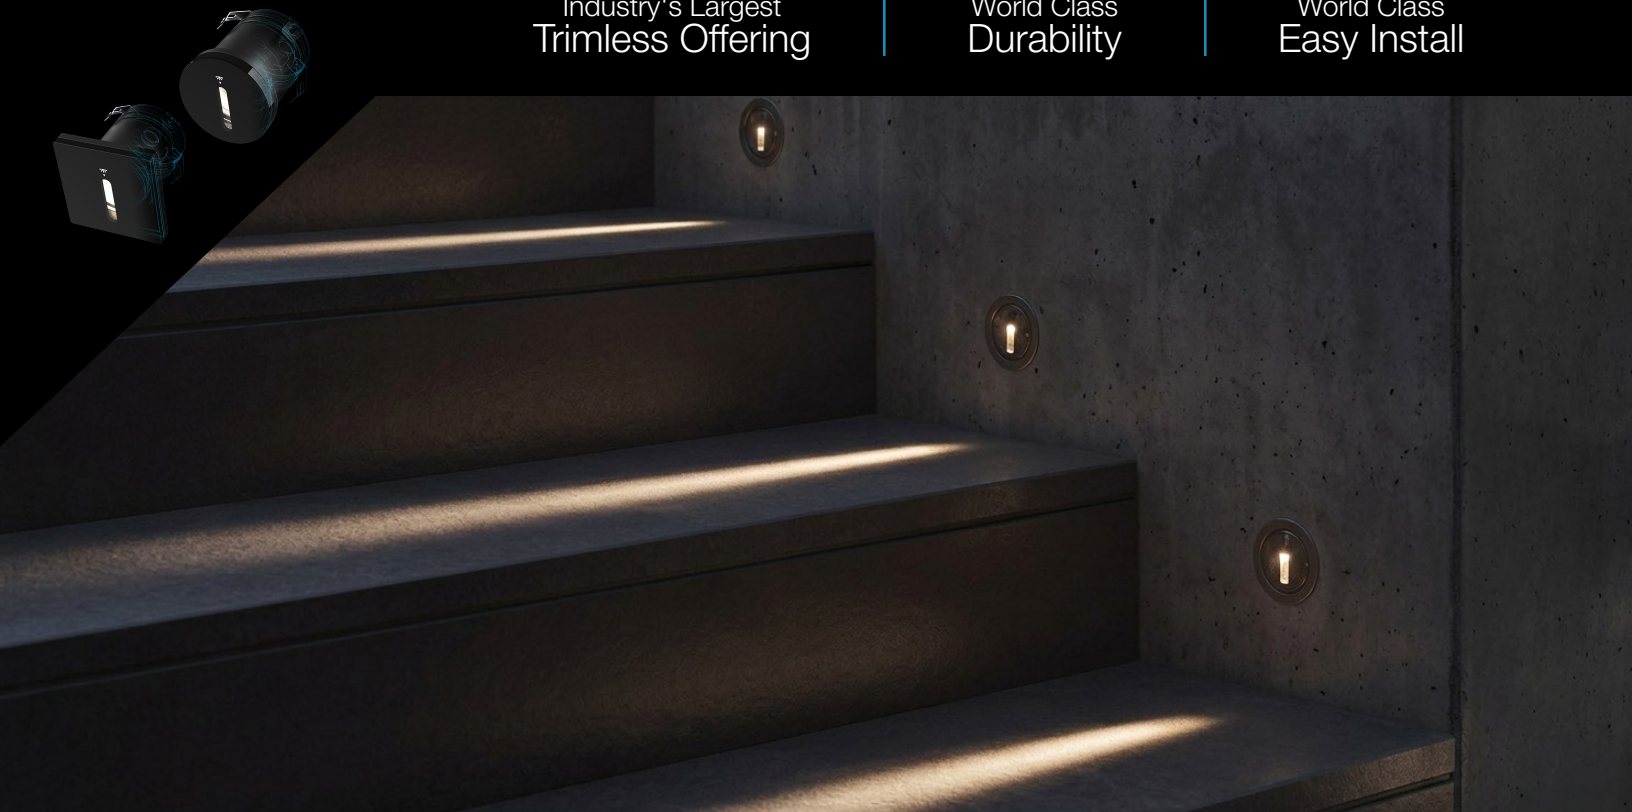

Features

Dimensions	1.77" x 2.48" 2.52" x 2.99"
Input Voltage	24VDC, Optional: UNV (120-277 VAC)
Power Consumption	1W - 5W
Color	2700K, 3000K, 3500K, 4000K 93 CRI (Standard)
Lumen Output	50 lm - 250 lm



NSP
Narrow
Spot (7°)



SP
Spot (18°)




NFL
Narrow
Flood (24°)



FL
Flood (36°)



WFL
Wide
Flood (60°)



DO
Diffused

Note: Beam angle options vary by size, see IES files for specific beam angles

Industry's Largest Trimless Offering

200,000+ Fixture Combinations
One Family, Limitless Solutions

World Class Durability Package

IP66, IP67, IP68, IP69K
IK10 Max Impact Resistance
2,200 lb Heavy Duty Walkover

World Class Easy Install Package

Field Wireable IP68 Connection System
Toolless Lever-Lock Termination Method

LUMEN DATA

ROUND

Model	Size	Wattage	Lumens
FCI-T175R	1.75" (45mm)	02W	100
		01W	50
FCI-T250R	2.50" (64mm)	05W	250
		03W	200

SQUARE

Model	Size	Wattage	Lumens
FCI-T175S	1.75" (45mm)	02W	100
		01W	50
FCI-T250S	2.50" (64mm)	05W	250
		03W	200

GLASS TYPE (SCREEN PRINTING)



SHW
Slot
Horizontal
Window



LVS
Linear
Vertical
Slot



ASE
Asymmetric
Scoop
Eyelid

OPTICAL DISTRIBUTION

