


Industry's Largest
Trimless Offering

World Class
Durability

World Class
Easy Install

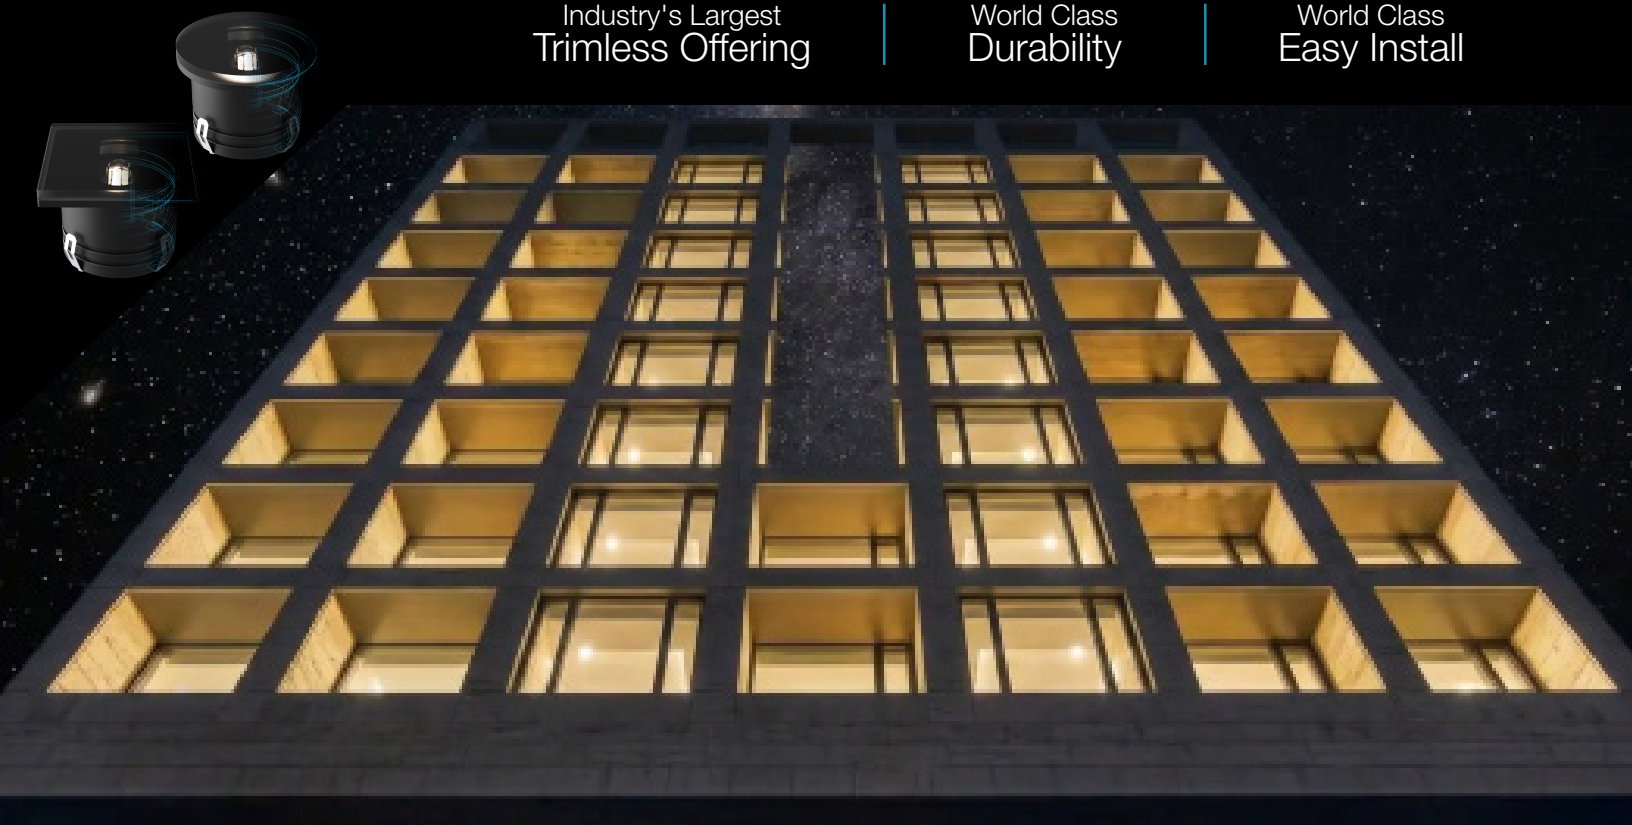

Features

Dimensions	3.15" x 3.23" 3.86" x 3.35"
Input Voltage	24VDC, Optional: UNV (120-277 VAC)
Power Consumption	5W - 7W
Color	2700K, 3000K, 3500K, 4000K 93 CRI (Standard)
Lumen Output	100 lm - 170 lm
Beam Spread	NWIN: Narrow Window Optic (8-10° x 100-110°) WWIN: Wide Window Optic (12-15° x 100-110°)



Industry's Largest Trimless Offering

200,000+ Fixture Combinations
One Family, Limitless Solutions

World Class Durability Package

IP66, IP67, IP68, IP69K
IK10 Max Impact Resistance
2,200 lb Heavy Duty Walkover

World Class Easy Install Package

Field Wirable IP68 Connection System
Toolless Lever-Lock Termination Method

LUMEN DATA

ROUND

Model	Size	Wattage	Lumens
FCI-T300R	3.00" (80mm)	05W	100
FCI-T375R	3.75" (98mm)	07W	150

SQUARE

Model	Size	Wattage	Lumens
FCI-T300S	3.00" (80mm)	05W	100
FCI-T375S	3.75" (98mm)	07W	150

OPTICAL DISTRIBUTION

