


FCSL Series

Exterior die cast brick light with die cast faceplate for masonry applications



Step light

corporate
t 800 900 1730
f 630 889 8106
3609 Swenson Ave
St. Charles, IL 60174

Catalog Number

Series	Voltage	Wattage	Ballast	LED diode	Finish	Accessories
FCSL101	120V	5BX \triangleleft	E Electronic	WH White	BK Black	DWR Dry wall wings for remodeling applications
FCSL102 ∇	277V	7BX \triangleleft	M Magnetic	WH White	WH White	EC E-coat
FCSL105		9BX \triangleleft		Consult factory for amber, blue, green or red	CC Custom color	EMR Emergency back-up, remote (PL only)
FCSL106 ∇		\triangleleft13BX \triangleleft				F Fuse
FCSL107 ∇						MLF Microlouver film
						P Prismatic lens, C73
						PCL Polycarbonate lens (PL only)
						RSDT Step down transformer remote (use with INC 277V)
						SLH Horizontal spread lens
						SLV Vertical spread lens

Electronic only
13Q

LED - New!

3-1 watt diodes (total 3 watt)
3-3 watt diodes (total 9 watt)
Note: SLH or SLV optional lens are recommended

\triangleleft Recommended lamping
\triangleleft 5W, 7W, 9W & 13BX magnetic, 120V only
∇ Can be used for drywall applications

Product Information

Listing: U.L. listed for interior and exterior wet locations.

Housing & Faceplate: Marine grade corrosion resistant heavy walled high pressure die-cast aluminum construction, with (2) 7/8" knockouts

Gasket: Neoprene continuous closed cell 'O' ring gasket to seal out contaminants.

Fasteners: Captive and recessed, die-cast face plate only, stainless steel, tamper resistant, hex socket screws.

Diffuser: Lens is 1/8" thick, tempered opal glass, clear for 105, 106, 107, heat resistant, standard.

Reflector: Precision formed reflector for maximum reflectance.

Socket: PL: Two pin (magnetic) or four pin (electronic) plug-in type compact fluorescent lamp holder (lamp by others). Holder assures precise optical alignment. **INC (120V only):** Mini-can base for incandescent quartz, or medium base for T10 lamp.




LED: 1 watt or 3 watt white diodes with a precision 45° beam angle lens. Integral inverter and driver potted with an input voltage of 120V or 277V. Consult factory for color changing or multi-color combinations.

Ballast: PL: Fluorescent normal power factor core and coil, U.L. listed ballast standard.

Finish: Five stage preparation process that includes chromate conversion and TGIC super polyester powder-coat is standard. Optional E-coat process added to standard finish including zinc phosphate.

Mounting: Concrete pour. Consult factory on accessories for drywall application.

Face Plates

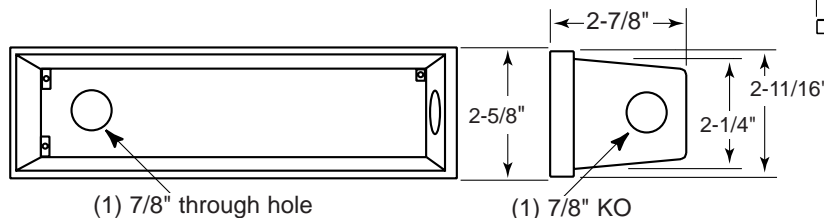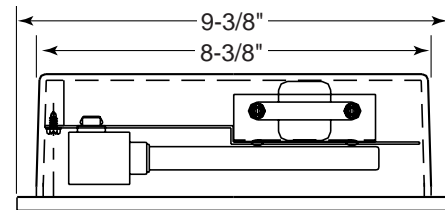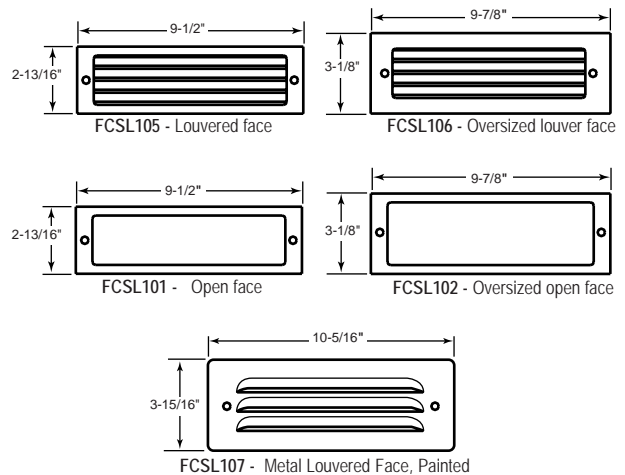

Back box detail